

Fuzzy Machine Learning: A Comprehensive Framework and Systematic Review

Jie Lu , Fellow, IEEE, Guangzhi Ma , Student Member, IEEE, and Guangquan Zhang 

(Survey Paper)

Abstract—Machine learning draws its power from various disciplines, including computer science, cognitive science, and statistics. Although machine learning has achieved great advancements in both theory and practice, its methods have some limitations when dealing with complex situations and highly uncertain environments. Insufficient data, imprecise observations, and ambiguous information/relationships can all confound traditional machine learning systems. To address these problems, researchers have integrated machine learning from different aspects and fuzzy techniques, including fuzzy sets, fuzzy systems, fuzzy logic, fuzzy measures, fuzzy relations, and so on. This article presents a systematic review of fuzzy machine learning, from theory, approach to application, with the overall objective of providing an overview of recent achievements in the field of fuzzy machine learning. To this end, the concepts and frameworks discussed are divided into five categories: 1) fuzzy classical machine learning; 2) fuzzy transfer learning; 3) fuzzy data stream learning; 4) fuzzy reinforcement learning; and 5) fuzzy recommender systems. The literature presented should provide researchers with a solid understanding of the current progress in fuzzy machine learning research and its applications.

Index Terms—Data stream learning, fuzzy logic, fuzzy sets and systems, machine learning, recommender systems, transfer learning.

I. INTRODUCTION

IN THE dynamic realm of technology, machine learning has profoundly transformed various sectors. It leads innovation by decoding complex data patterns, driving advancements in artificial intelligence, and influencing how we engage with information and understand the capabilities of computational systems. However, with most of the existing machine learning methods, accuracy suffers in scenarios characterized by uncertainty, such as the only available observations are imprecise or where the data are noisy or incomplete. In addition, many real-world datasets contain uncertain relationships, and conventional machine learning methods generally find it difficult to

identify or work with these structures. To address these issues, researchers have used fuzzy techniques to integrate into machine learning called *fuzzy machine learning* (FML) [1] as a solution, since fuzzy techniques are successful to deal with uncertainties. FML systems fuse machine learning algorithms with fuzzy techniques, such as fuzzy sets [2], fuzzy systems [3], fuzzy clustering [4], fuzzy relations [5], fuzzy measures [6], fuzzy matching [7], fuzzy optimization [8], and so on, to build new models that are more robust to the many and varied types of uncertainty found in real-world problems.

FML stands out as an invaluable ally in the realm of complex and dynamic (uncertain) environments, presenting substantial advantages that elevate its efficacy. Unlike traditional machine learning approaches, fuzzy techniques that are generally based on the concept of fuzzy sets [9] and fuzzy theory [10] excel in capturing and navigating the nuanced shades of uncertainty inherent in dynamic scenarios. Their inherent ability to model uncertainty empowers it to gracefully adapt to the ever-changing patterns that characterize dynamic environments. In situations where traditional models might falter or struggle to keep pace, fuzzy techniques emerge as robust problem solvers, providing a more accurate representation of the inherent fuzziness present in real-world data [11]. Furthermore, in the relentless quest for interpretability, FML triumphs. Its models not only navigate complexity but also offer clear insights into decision-making processes. This interpretability proves to be a critical asset in dynamic environments, where understanding the rationale behind model decisions is paramount. Next, we summarize some main successes of how fuzzy techniques can improve machine learning algorithms.

- 1) Fuzzy sets [2] can be used to represent vague or ambiguous concepts and data, such as that commonly found with linguistic variables, noisy or incomplete data, and interval-valued data. The fuzzy sets enhance the algorithm's ability to make decisions in uncertain and complex situations, which can be particularly useful in applications where real-world conditions can be unpredictable, such as robotics or autonomous vehicles.
- 2) Fuzzy-rule-based systems [3] can provide a transparent and interpretable prediction framework. Fuzzy-rule-based systems use linguistic rules to represent knowledge and, so, can be used to generate explanations for the decisions made by the system. This can be useful in applications like medical diagnosis.

Manuscript received 4 July 2023; revised 8 January 2024 and 7 March 2024; accepted 1 April 2024. Date of publication 11 April 2024; date of current version 2 July 2024. This work was supported by the Australian Research Council under Grant FL190100149 and Grant DP220102635. Recommended by Associate Editor F. Doctor. (Corresponding author: Jie Lu.)

The authors are with the Australian Artificial Intelligence Institute, Faculty of Engineering and Information Technology, University of Technology Sydney, Sydney, NSW 2007, Australia (e-mail: jie.lu@uts.edu.au; guangzhi.ma@student.uts.edu.au; guangquan.zhang@uts.edu.au).

Digital Object Identifier 10.1109/TFUZZ.2024.3387429

- 3) Fuzzy clustering [4], which is a well-known approach to clustering, can improve machine learning algorithms by identifying patterns in data that traditional clustering methods may not easily identify. Fuzzy clustering not only allows for overlapping clusters but can also handle data points that may not belong to any particular cluster with certainty. This can be useful in applications like image recognition.
- 4) Fuzzy relations [5] can provide a more flexible and nuanced representation of the relationships between variables or data points. They can also capture nonlinear relationships to enable more accurate and expressive machine learning models. In addition, fuzzy relations are useful when handling multimodal data or data assembled from multiple sources because researchers can define fuzzy relations between the different modalities to result in a more comprehensive and accurate model.

In the past decade, there have been over 500 000 articles in high-quality journals and conference proceedings containing the words “fuzzy” and “machine learning.” However, none of these articles provides a comprehensive review of the recent literature on FML. Several previous surveys in the area only offered valuable insights into certain subfields of FML. For example, Baraldi and Blonda [12] provided a brief review of fuzzy clustering algorithms for pattern recognition, while Škrjanc et al. [13] summarized models based on evolving fuzzy rules and neuro-fuzzy networks (NFNs) for clustering, regression, identification, and classification problems. In addition, Zheng et al. [14] reviewed recent work on fusing deep learning models with fuzzy systems. Moreover, the last decade has witnessed the emergence of new subfields in FML, such as fuzzy transfer learning and fuzzy data stream learning. Providing an investigative report to outline these new subfields is significant. For these reasons, a new, more comprehensive, and more up-to-date survey of FML is warranted. This article primarily targets researchers interested in employing fuzzy techniques to enhance the performance of machine learning methods, particularly in situations involving complex or uncertain factors.

The studies included in this survey were selected in the following three steps.

- Step 1) Identify and determine an appropriate set of publication databases to search. We searched the well-known databases of Science Direct, ACM Digital Library, IEEE Xplore, and SpringerLink. These provided a comprehensive bibliography of research papers on machine learning and FML.
- Step 2) *Preliminary screening of articles*: The first search was based on keywords. The articles were then selected for inclusion in the review if they: a) presented a new theory, algorithm, or methodology in the area of FML; or b) reported an application built around a FML algorithm.
- Step 3) *Filtering the results for presentation*: The articles selected in Step 2 were then divided into five groups to be summarized in separate sections: a) fuzzy classical machine learning; b) fuzzy transfer learning; c) fuzzy data stream learning; d) fuzzy reinforcement learning

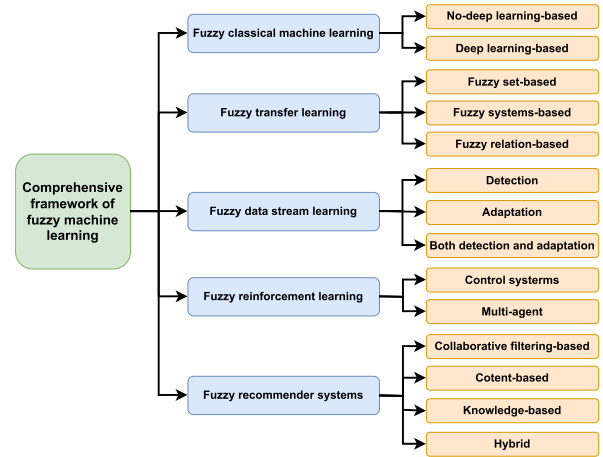


Fig. 1. Main framework of this survey.

(RL); and e) fuzzy recommender systems. At this point, we undertook one final screening of the articles (see Fig. 1). A study was retained if it demonstrated sufficient: a) novelty, i.e., it had been published within the last decade; and b) impact, i.e., it had been published in a high-quality journal/conference or having high citations.

The main contributions of this article are as follows.

- 1) It comprehensively summarizes the developments and achievements in the field of FML. Work in this field is divided into five main categories for discussion.
- 2) The shortcomings of traditional machine learning methods in real-world scenarios are analyzed for each category, followed by an explanation of how FML has been used to address these issues. The insights provided are designed to help researchers understand the context of developments in FML research and its applications.
- 3) It provides a critical discussion of the state-of-the-art (SOTA) FML models and outlines directions for future research.

The rest of this article is organized as follows. Section II provides some relevant mathematical concepts to illustrate how fuzzy logic can be integrated into machine learning. Sections III–VII discuss the five categories of FML, respectively. Finally, Section IX summarizes the material covered and goals of this review and outlines future work.

II. BASIC CONCEPTS OF FML

In this section, we briefly introduce some relevant mathematical concepts to illustrate how fuzzy logic can be integrated into transfer learning, data stream learning, RL, and recommender systems. These concepts should help researchers to better understand the articles introduced in the following sections.

A. Fuzzy Transfer Learning

Transfer learning [15] tries to train a well-performed model in one domain (target) by leveraging knowledge from another domain (source) that has different distribution or learning tasks

compared with the previous one. This section introduces two representative fuzzy transfer learning frameworks: 1) fuzzy-rule-based [16] and 2) fuzzy-equivalence-based [17].

1) *Fuzzy-Rule-Based Transfer Learning Framework [16]:* Let $\mathcal{S} = \{\mathcal{S}^1, \mathcal{S}^2, \dots, \mathcal{S}^N\}$ denote a set of source domains, where $\mathcal{S}^n = \{(\mathbf{x}_i^{S_n}, y_i^{S_n}) | \mathbf{x}_i^{S_n} \in \mathcal{X}^n, y_i^{S_n} \in \mathcal{Y}\}_{i=1}^{m_n}, n \in [N]$ and $(\mathbf{x}_i^{S_n}, y_i^{S_n})$ is the i th input-output data pair in the n th source domain. Here, $\mathcal{X}^n \subset \mathbb{R}^p$ denotes the feature space of each source domain and \mathcal{Y} is a response space ($\mathcal{Y} = \{1, 2, \dots, K\}$ given a classification task, and $\mathcal{Y} \subset \mathbb{R}$ given a regression task). $\mathcal{T} = \{\mathbf{x}_i^T | \mathbf{x}_i^T \in \mathcal{X}^T\}_{i=1}^{m_t}$ is the unlabeled target domain (for unsupervised scenario), where $\mathcal{X}^T \subset \mathbb{R}^p$ is the feature space of the target domain. In homogeneous cases, $\mathcal{X}^1, \dots, \mathcal{X}^N$ and \mathcal{X}^T have the same number of features, while they contain different number of features in heterogeneous cases.

We denote $\mathcal{R} = \{\mathcal{R}^1, \mathcal{R}^2, \dots, \mathcal{R}^N\}$ as the constructed fuzzy rules space of \mathcal{S} , where $\mathcal{R}^n = \{r(v_l^{S_n}, a_l^{S_n})\}_{l=1}^{l_n}, n \in [N]$ is the n th rule set of \mathcal{S}^n . Here, the rule $r(v_l^{S_n}, a_l^{S_n})$ is represented as

$$\begin{aligned} & \text{if } \mathbf{x}_i^{S_n} \text{ is } A_l(\mathbf{x}_i^{S_n}, v_l^{S_n}), \\ & \text{then } y_i^{S_n} \text{ is } P_l(\mathbf{x}_i^{S_n}, a_l^{S_n}), \\ & l = 1, 2, \dots, l_n. \end{aligned} \quad (1)$$

Let \mathcal{R}^T denote the obtained fuzzy rules of target domain \mathcal{T} .

Finally, $\Phi = \{\Phi^1, \Phi^2, \dots, \Phi^N\}$ is denoted as the conclusion of \mathcal{R} (e.g., linear combination), where $\Phi^n(\mathcal{R}^n, \boldsymbol{\mu}_n), n \in [N]$ is the n th conclusion of \mathcal{R}^n . Hence, fuzzy-rule-based transfer learning aims to use the knowledge from $\mathbf{D} = \{\mathcal{S}, \mathcal{R}, \Phi\}$ to fit the data in the target domain, i.e., obtain \mathcal{R}^T and the conclusion of \mathcal{R}^T .

2) *Fuzzy-Equivalence-Based Transfer Learning Framework [17]:* Different from fuzzy-rule-based transfer learning, this framework applies the fuzzy equivalence relations among features in source and target domains to replace the fuzzy rules. Let $\mathcal{U} = \{\mathcal{U}^1, \mathcal{U}^2, \dots, \mathcal{U}^N\}$ denote the membership function space of the features in \mathcal{S} , where $\mathcal{U}^n = \{\mu_1^{S_n}, \mu_2^{S_n}, \dots, \mu_{m_n}^{S_n}\}, n \in [N]$ and $\mu_i^{S_n}, i \in [m_n]$ is the membership function of $\mathbf{x}_i^{S_n}$. $\mathbf{R}_S^M = \{\mathbf{R}_1^M, \mathbf{R}_2^M, \dots, \mathbf{R}_N^M\}$ denotes as the fuzzy equivalence relation space on \mathcal{S} , where $\mathbf{R}_n^M, n \in [N]$, is the fuzzy equivalence relation on \mathcal{S}^n . Here, $\mathbf{R}_n^M, n \in [N]$, is an $m_n \times m_n$ matrix (see [17] and [18] for details)

$$(\mathbf{R}_n^M)_{ij} = \mathbf{R}_{S_n}(\mathbf{x}_i^{S_n}, \mathbf{x}_j^{S_n}; \mu_i^{S_n}, \mu_j^{S_n}), \quad i, j \in [m_n] \quad (2)$$

where \mathbf{R}_{S_n} is a fuzzy equivalence relation operator on \mathcal{S}^n .

Hence, the fuzzy-equivalence-based transfer learning framework aims to use the knowledge from $\mathbf{D} = \{\mathcal{S}, \mathcal{U}, \mathbf{R}_S^M\}$ to fit the data in the target domain.

B. Fuzzy Data Stream Learning

Data stream learning [19], [20], also known as stream mining, refers to a set of techniques and algorithms designed to handle and analyze data that arrive continuously over time in a streaming fashion. However, in real-world scenarios, the statistical properties of the data may change over time, making models and algorithms that were previously accurate less effective over

time. This phenomenon is known as concept drift [21], [22], [23]. A formal definition of concept drift follows.

Definition 1 (Concept drift [23]): Consider a time period $[0, t]$ and a set of samples, denoted as $S_{0,t} = \{d_0, \dots, d_t\}$, where $d_i = (X_i, y_i)$ is one observation (or one data instance). X_i is the feature vector, y_i is the label, and $S_{0,t}$ follows a certain distribution $\mathbb{F}_{0,t}(X, y)$. Concept drift occurs at time stamp $t + 1$, if $\mathbb{F}_{0,t}(X, y) \neq \mathbb{F}_{t+1,\infty}(X, y)$, denoted as $\exists t : \mathbb{P}_t(X, y) \neq \mathbb{P}_{t+1}(X, y)$.

Hence, when a concept drift occurs at $t + 1$, we aim to adapt the predictor $H_t = \arg \min_{h \in \mathcal{H}} \ell(h, X, y | (X, y) \in \mathbb{P}_t(X, y))$ to fit the new distribution $\mathbb{P}_{t+1}(X, y)$. Next, we briefly introduce a fuzzy-clustering-based drift learning structure [24] to show how fuzzy logic can be integrated into data stream learning.

In fuzzy-clustering-based drift learning [24], fuzzy clustering is applied to learn how many patterns exist in the observed data instances and the membership degree of each instance belonging to each pattern during the process of learning the parameters for the predictor. Let $\{\mu_{tk}\}$ be the membership of the t th instance belonging to the k th cluster, $\{C_k\}$ be the k th cluster centroid, $\{X_t\}$ be the input variable at time step t , and $\{\theta_k\}$ be the parameter for the k th predictor. Then, the purpose of fuzzy-clustering-based drift learning is shown as follows:

$$\begin{aligned} & \min_{\mu_{tk}, C_k, \theta_k} \sum_{t=1}^N \left(\sum_{k=1}^K \mu_{tk} X_t \theta_k - y_t \right)^2 \\ & + \lambda_1 \sum_{k=1}^K \sum_{t=1}^N \mu_{tk}^2 \| X_t - C_k \|_2^2 + \lambda_2 \sum_{k=1}^K \| \theta_k \|_2^2 \\ & \text{s.t. } \sum_{k=1}^K \mu_{tk} = 1, \quad t \in [N] \end{aligned} \quad (3)$$

where λ_1 and λ_2 are two preassigned parameters. Fuzzy clustering [25], [26] is utilized to optimize μ_{tk} and C_k .

C. Fuzzy Reinforcement Learning

RL [27] is the study of planning and learning in a scenario where a learner (called an agent) proactively interacts with the environment to achieve a certain goal. The agent's aim is to develop the optimal strategy for accumulating rewards. It does this by learning from the feedback it receives. RL has been successfully applied to a variety of real-world problems, such as robotics control [28], game playing [29], and autonomous driving [30]. In this section, we provide information of how fuzzy logic can be integrated into RL.

First, fuzzy sets can be used to represent uncertainty in state, action, or reward spaces in RL. For instance, fuzzy reward signals [31] represent the uncertainty or imprecision in the reward received by an agent. In addition, fuzzy controllers [32] that use fuzzy logic to map inputs to control actions can be integrated into RL systems to handle uncertain or qualitative control decisions. Next, we give a general mathematical expression for a fuzzy controller. Let X_1, \dots, X_n be the input variables to the fuzzy controller and Y be the output variable representing the control action. The fuzzy sets associated with each variable are denoted

as A_1, \dots, A_n for inputs and B for the output. Let $\mu_{A_i}(x_i)$ represent the membership function for the fuzzy set A_i of input X_i , and let $\mu_B(y)$ represent the membership function for the fuzzy set B for output Y . Then, generic fuzzy rules that define the mapping from inputs to outputs can be expressed as

$$\text{if } X_i \text{ is } A_{1j} \text{ and } \dots \text{ and } X_n \text{ is } A_{nj}, \text{ then } Y \text{ is } B_j. \quad (4)$$

After applying the fuzzy rules, defuzzification is performed to obtain a crisp output value.

Furthermore, a fuzzy inference system can be used to make decisions in RL [33], such as determining the next action to take based on fuzzy input signals representing uncertain states or rewards. For example, fuzzy Q -learning [34] extends Q -learning by incorporating fuzzy logic to handle uncertain and imprecise state–action pairs. Fuzzy rules and membership functions are applied to update the Q -values.

D. Fuzzy Recommender System

A recommender system [35], [36] is a type of information filtering system that analyzes user preferences or behavior to provide suggestions personalized to that particular user. In this section, we provide information of how fuzzy logic can be integrated into recommender systems.

Let $\mathcal{V} = \{v_1, v_2, \dots, v_M\}$ denote the item set and $\mathcal{U} = \{u_1, u_2, \dots, u_N\}$ denote the user set. In data preprocess, a fuzzy set or linguistic variable can be used to represent item/user terms and user-item rating matrix \mathbf{R} , $(\mathbf{R})_{ij} = r_{u_i, v_j}$, $i \in [N]$, $j \in [M]$ (r_{u_i, v_j} is a rating of a user for an item). The fuzzy set can help dealing with some types of uncertainty in the description of item features. For example, Yager [37] denotes a set of primitive assertions to describe items, denoted as $A = \{A_1, \dots, A_n\}$. For one item v , we can view the item v as a fuzzy subset over the space A . If one item v satisfies assertion A_i , the assertion has validity equal to one otherwise zero. The membership degree on A_i in v is $v(A_i)$. Then, an item in a recommender system can be represented as a fuzzy set over an assertion set. In addition, a linguistic variable is widely used to generate the user-item linguistic-term-based rating matrix \mathbf{R} .

In the fuzzy user preference/profile generation process, the fuzzy-rule-based system, such as Takagi–Sugeno–Kang fuzzy system (TSK-FS), is usually applied to model the uncertainty and imprecision inherent in users' preferences. Finally, in order to obtain the final predicted ratings \hat{r}_{u_i, v_j} for unrated items, fuzzy similarity is widely used for calculating the similarity between items and users. For instance, $S(v_i, v_j)$ [38] is a fuzzy similarity to measure the similarity between item v_i and v_j

$$S(v_i, v_j) = \frac{\sum_{u \in U_{ij}} \int_0^1 f([r_{u, v_i}]_\alpha, [r_{u, v_j}]_\alpha) d\alpha}{\sqrt{\sum_{u \in U_{ij}} (\int_0^1 g([r_{u, v_i}]_\alpha) d\alpha)^2} \sqrt{\sum_{u \in U_{ij}} (\int_0^1 h([r_{u, v_j}]_\alpha) d\alpha)^2}} \quad (5)$$

where U_{ij} represents the set of users that both rated items v_i and v_j . $[r_{u, v_i}]_\alpha$ represent the α -cut of r_{u, v_i} (linguistic variable), and f , g , and h are predefined functions.

III. FUZZY CLASSICAL MACHINE LEARNING

Classical machine learning algorithms, such as decision trees, support vector machines (SVMs), and neural networks, have been responsible for remarkable achievements both theoretically and from a practical point of view. Numerous articles involve combining fuzzy techniques with classical machine learning algorithms to overcome different types of problems with uncertainty, such as incomplete information and imprecise observations. In this section, we summarize these works, dividing the techniques into two categories: 1) non-deep-learning-based method and 2) deep-learning-based method.

A. Non-Deep-Learning-Based Method

The non-deep-learning-based methods can be further divided into three main types: clustering, regression, and classification. Each is discussed in turn next.

1) *Clustering*: Fuzzy clustering has been widely researched over the last 40 years, and several survey papers have already been published summarizing prior work in this field [39], [40]. First, we summarize the main ascendancies of applying fuzzy techniques in clustering as follows.

- a) *Soft assignment of data points*: Traditional clustering algorithms assign each data point to a single cluster, resulting in a hard assignment. However, in many cases, some of the data points may have ambiguous relationships with the clusters or their memberships may overlap into multiple clusters. Fuzzy clustering allows for *soft assignment*, where a data point's membership in a cluster is not simply binary, but rather it is measured in degrees and can apply to multiple clusters.
- b) *Flexibility in cluster shape*: Unlike traditional hard clustering algorithms, such as K -means, which assume spherical clusters of equal size, fuzzy clustering allows for more flexible and irregular cluster shapes. Fuzzy logic allows researchers and analysts to model overlapping clusters, clusters of varying sizes and densities, and clusters with complex boundaries. Thus, fuzzy clustering is highly suitable for datasets with complex structures.
- c) *Handling outliers and noise*: Applying fuzzy logic makes clustering more robust to outliers and noisy data than traditional clustering methods. With fuzzy logic, a data point can have a low membership degree to a cluster, which effectively reduces the influence of outliers or noisy data points on the overall clustering results.
- d) *Interpretability and granularity*: The fuzzy membership degrees assigned to data points offer a quantitative measure of their association with each cluster. This allows for a more nuanced understanding of the data and provides insights into the degree of similarity or dissimilarity between data points and clusters. Fuzzy logic also allows for the representation of gradual transitions, providing a more detailed and fine-grained view of the clustering.

One of the most powerful and well-known algorithms in fuzzy clustering analysis is fuzzy c-means (FCM), developed by Dunn in 1973 [25] and further developed by Bezdek et al. in 1984 [41]. In the intervening years, FCMs have been widely used and revised

many times to deal with different types of problems [42], [43], [44], [45], [46]. Among the most recent of these achievements, Ding and Fu [42] proposed a novel kernel-based FCM clustering algorithm that uses genetic algorithm optimization to improve clustering performance. To enhance the robustness of image segmentation, Gao et al. [46] presented a new robust FCM clustering method that combines an elastic FCM with a smoothing method. This elastic FCM provides a sparser description for reliable points and a fuzzier description of the marginal points of clusters. Lei et al. [43] designed a more efficient and more robust FCM algorithm for fast and reliable image segmentation. Their variant is based on morphological reconstruction and membership filtering. Subsequently, Lei et al. [47] built a fuzzy clustering framework around the above implementation for image segmentation.

In research departing from FCM, Jiao et al. [48] developed a fuzzy clustering algorithm that relies on unsupervised fuzzy decision trees to improve model interpretability. To cluster multiple nominal data streams, Sangma et al. [49] proposed a fuzzy hierarchical clustering method that involves the clustering-by-variable approach. The method calculates the fuzzy affinity of data streams to different clusters using normalized cosine similarity and handles concept evolution by updating the hierarchical clustering structure.

2) *Regression*: Fuzzy regression models [50] perform a type of regression analysis that incorporates both possibility theory and fuzzy set theory [51]. They are particularly useful when precise data are lacking or when the relationships between input and output variables are complex and difficult to model using classical regression methods. In addition, fuzzy regression models are good at expressing nonlinear relationships and dealing with noisy data. Fuzzy logic handles the nonlinear relationships between variables. Noisy or incomplete data are handled by allowing for partial memberships and fuzzy sets. Thus, by assigning lower membership values to outliers or inconsistent data points, fuzzy regression models provide a mechanism for mitigating the impact of this type of uncertainty. Another technique for improving the performance of regression models has been to integrate fuzzy techniques with classical machine learning techniques, such as SVM [52], [53], [54] and neural networks [55], [56], [57], [58]. Other solutions combine interval regression analysis [59] with machine learning methods [60], [61], [62], [63].

The latest developments in fuzzy regression analysis include He et al. [64], [65], who developed a fuzzy nonlinear regression model using a random weight network that takes triangular fuzzy numbers as its inputs and outputs the same. Baser and Demirhan [66] proposed a new method that combines fuzzy regression models with an SVM to estimate the yearly mean and daily values of horizontal global solar radiation. By applying fuzzy regression functions, their method is robust to outlier observations and problems with overfitting. Chachi [67] designed a robust fuzzy regression modeling technique based on weighted least squares fuzzy regression to handle crisp input-fuzzy output data. Choi et al. [68] addressed issues with multicollinearity in fuzzy regression models by incorporating ridge regression. Naderkhani et al. [69] proposed an adaptive neuro-fuzzy

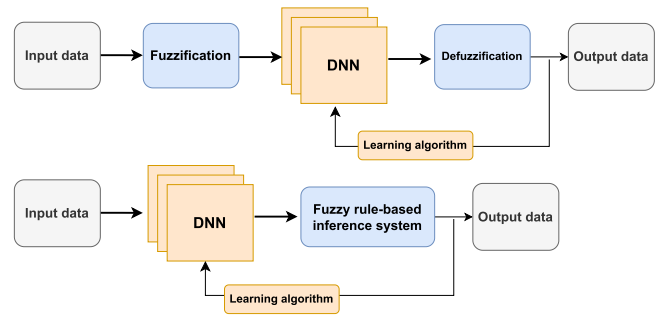


Fig. 2. Two different FNN structures.

inference system for analyzing and predicting nonparametric fuzzy regression functions with crisp-valued inputs and symmetric trapezoidal fuzzy outputs. Xia et al. [70] developed a novel regression model built around a Takagi–Sugeno fuzzy regression tree to address complex industrial modeling problems, while Zhang et al. [71] introduced an interpretable model based on graph community neural networks and time-series fuzzy decision trees for predicting the delays experienced by a high-speed train.

3) *Classification*: Numerous studies have combined fuzzy techniques with classical machine learning algorithms to address classification problems. The techniques used include fuzzy decision trees [72], [73], [74], [75], [76], neuro-fuzzy classification [77], [78], [79], and support-vector-regression-based fuzzy classification [80], [81]. Rabcan et al. [82], for example, have recently introduced a new approach to signal classification that includes a fuzzification procedure in the transformation process and fuzzy decision trees to perform classifications. Xue et al. [83] proposed an adaptive softmin model based on an enhanced TSK-FS to classify high-dimensional datasets. An adaptive softmin function overcomes the drawbacks of “numeric underflows” and “fake minimums” that frequently arise in existing fuzzy systems. However, although the enhanced TSK-FS maintains adequate rules, it does not grow the number of rules exponentially with features. Ma et al. [111], [84] put forward a novel framework for addressing multiclass classification problems with imprecise observations that provides a theoretical analysis of the problem based on fuzzy Rademacher complexity. The imprecise observations can be either fuzzy-valued or interval-valued, and the framework, which combines classical machine learning techniques like neural networks and SVM with a fuzzy-membership-based defuzzification method, extracts crisp-valued information from these fuzzy- or interval-valued features.

B. Deep-Learning-Based Method

Fuzzy neural networks (FNNs), also known as NFNs, are a type of hybrid neural network that combine fuzzy techniques with neural networks to improve the efficiency and interpretability of machine learning models. A standard FNN structure is illustrated in Fig. 2. The fuzzy logic component of FNNs allows them to handle imprecise or incomplete data and make decisions based on uncertain inputs. In addition, using an FNN capitalizes on the many significant advances achieved through deep learning

TABLE I
SUMMARY OF THE SOTA DEEP-LEARNING-BASED FNN ACHIEVEMENTS

Year	Fuzzy technique	Deep learning algorithm		No.
		CNN	Others (e.g., RNN)	
2020	Fuzzy clustering	[94] [107] [108] [109]	-	4
	Type-1 fuzzy systems	[94] [108] [110] [91] [111]	[101] [112] [113]	8
	Type-2 fuzzy systems	[107] [114] [115]	-	3
	Others	[116]	[116] [117] [118] [119]	4
2021	Type-1 fuzzy systems	[120] [121]	[122] [123] [124] [125]	6
	Type-2 fuzzy systems	-	[126] [127] [128]	3
	Fuzzy entropy	[129]	[129]	1
2022	Fuzzy clustering	-	[130] [131]	2
	Type-1 fuzzy systems	[132] [133] [134] [135] [136] [137]	[132] [130] [138] [139] [140] [141] [142] [143]	13
	Others	[144] [145]	-	2
2023	Fuzzy clustering	[146]	[147]	2
	Type-1 fuzzy systems	[148] [149] [146] [150] [151] [152]	[147] [153] [154] [155] [156] [157]	11

in fields such as computer vision, natural language processing, and robotics.

Many researchers have fused deep learning methods with fuzzy techniques to address different types of problems with uncertainty. The most commonly used deep learning models include deep belief networks [85], convolutional neural networks (CNNs) [86], and recurrent neural networks (RNNs) [87]. In this section, we summarize the SOTA achievements in FNNs from 2020 to 2023. Earlier research successes can be found in prior surveys like [14], [88], and [89].

Chen et al. [90] devised a fuzzy deep neural network (DNN) with a sparse autoencoder as a way to try and predict human intentions. The model is based on human emotions and identification information. Lu et al. [91] constructed a novel hashing method that integrates DNNs and fuzzy logic to measure the similarity between pairwise images. Zadeh [51] introduced the concept of a type-2 fuzzy set as far back as 1975. These sets, whose membership level themselves are type-1 fuzzy sets, can be used when there is uncertainty about the membership function itself—for example, if one does not know the shape of the function or some of its parameters. The superior performance of type-2 fuzzy sets has seen them used in a range of machine learning tasks. For instance, to perform complex stock time-series tasks, Cao et al. [92], [93] designed two multiobjective evolution models. Both combine interval type-2 fuzzy sets with rough FNNs.

Several fuzzy-based ensemble models have also been developed to address problems like load forecasting [94], image classification [95], [96], [97], [98], and image fusion [99], [100]. For example, Khatter and Ahlawat [101] combined an RNN with fuzzy techniques and a web blog searching method to enhance classification performance, while Concepción et al. [102] presented a theoretical analysis of why fuzzy-rough cognitive networks delivered better performance than the SOTA classifiers. Long short-term memory models have also been combined with fuzzy techniques. Some example works include [103], [104], [105], and [106]. Table I provides a summary of the SOTA literature related to deep learning with FNNs.

TABLE II
SUMMARY OF THE SOTA PAPERS IN FUZZY TRANSFER LEARNING

Fuzzy techniques	Type		No.
	Regression	Classification	
Fuzzy sets	[169] [172] [173]	[168] [171] [197]	6
Fuzzy systems	[174] [176] [177] [186] [188] [189] [192] [16] [193]	[175] [178] [179] [180] [181] [182] [183] [184] [185] [187] [190] [191] [198] [199]	23
Fuzzy relations	-	[18] [196] [17] [200]	4

In summary, combining fuzzy techniques with classical machine learning algorithms is not only useful for solving uncertainty problems, like imprecise or noisy data, but can also improve the interpretability and robustness of the algorithms. Fuzzy sets are good at handling ambiguity and uncertainty and typically provide a more realistic representation of the inherent fuzziness and uncertainty present. In addition, fuzzy logic tends to improve interpretability. These logics often rely on rule-based systems, where the rules express relationships between the input variables and the output decisions. The rules can either be derived from expert knowledge or be learned from the data.

IV. FUZZY TRANSFER LEARNING

Notably, most current transfer learning [158] methods have limitations when handling real-world situations with uncertainty, such as when only a few labeled instances are available. To overcome these problems, many researchers have turned to fuzzy sets and fuzzy logic.

Existing studies on transfer learning can be divided into categories based on the type of knowledge that is being transferred. These knowledge categories include instances [159], feature representations [160], model parameters [161], and relational knowledge [162]. Alternatively, in terms of the problem settings tackled, studies can be grouped into four categories: multitask learning [163], domain adaptation [164], [165], cross-domain adaptation [166], and heterogeneous learning [167]. We have divided our summary of recent works (2015–2023) into three areas based on the fuzzy technique used. These are fuzzy sets, fuzzy systems, and fuzzy relations. Table II summarizes recent achievements in the field of fuzzy transfer learning.

A. Transfer Learning Based on Fuzzy Sets

Behbood et al. [168] proposed an innovative fuzzy-based transfer learning framework to predict long-term bank failures. The framework relies on fuzzy sets, as well as similarity and dissimilarity, to modify the labels of target instances predicted by an FNN classifier. Wu et al. [169] developed OwARR, a new algorithm that combines fuzzy sets with domain adaptation. The aim is to reduce the amount of object-specific calibration data so as to solve the important regression problem of estimating online drowsiness in drivers from EEG signals in brain–computer interfaces. Gargees et al. [170] proposed a transfer learning method for the possibilistic c-means clustering problem with insufficient data, overcoming a crucial problem for clustering tasks where the source and target domains have a different number of clusters. Based on the idea of fuzzy sets, the proposed algorithm employs

historical cluster centers of the data in the source domain as a reference to guide the clustering of data in the target domain.

In terms of applying type-2 fuzzy sets to transfer learning models, Sun et al. [171] proposed a new transfer learning model to address the uncertainty caused by conflicting implications in text sequence recognition. The proposed model uses FCM to transform the correspondences among words into information granules. By integrating type-2 fuzzy sets into a hidden Markov model, this granular information can be used for sequence recognition. To reliably estimate gross domestic product (GDP) from only CO₂ emission data, Shukla et al. [172] proposed a new approach to a kernel extreme learning machine (KELM) that combines transfer learning with interval type-2 fuzzy sets. Interval type-2 fuzzy sets are used to improve the efficiency of the knowledge transfer. To consider the uncertainty in input datasets, Kumar et al. [173] presented a novel transfer learning approach that incorporates type-1 and interval type-2 fuzzy sets into a KELM framework. The aim is to predict GDP based on uncertain carbon emissions data.

In general, fuzzy sets have been widely applied to address uncertainty in data in transfer learning scenarios, and, experimentally, they have been shown to improve both the efficiency and accuracy of knowledge transfer in comparison to nonfuzzy methods.

B. Transfer Learning Based on Fuzzy Systems

Most of the existing transfer learning methods have a number of drawbacks. For instance, the performance of model-based transfer learning algorithms is heavily dependent on the selected classifier. In addition, feature-based transfer learning methods can negatively impact the discriminant information and geometric properties of instances from both the source and target domains. Furthermore, the lack of interpretability and an inability to handle uncertainty are two significant flaws. To address these issues, researchers have turned to fuzzy-rule-based systems to improve interpretability and handle uncertainty. Notably, the TSK-FS [3] has received significant attention in this regard.

Shell and Coupland [174] proposed FuzzyTL, a novel structure that combines transfer learning with a fuzzy-rule-based system. This structure is designed to bridge the knowledge gap between contexts that lack prior direct contextual knowledge. Meher and Kothari [175] developed an interpretable domain adaptation method, named the rule-based fuzzy extreme learning machine (ELM) classification model, that uses a fuzzy inference system to design an ELM architecture for remote sensing image classification. The model uses the maximum fuzzy membership grade of features, which is characterized by class-belonging fuzzification, to construct the fuzzy rules and two rule extraction matrices. Moreover, Deng et al. [176], [177] proposed two novel transfer learning approaches for regression tasks using the Mamdani–Larsen fuzzy system and the TSK-FS coupled with a new fuzzy logic algorithm and its objective functions. However, they noticed that the antecedent parameters of the TSK-FS model constructed in the target domain were directly inherited from the source domain, which meant that they could not leverage enough knowledge from the source domain. To address this

problem, Deng et al. [178] proposed a new transfer learning method that contains two knowledge-leveraging strategies to better learn the antecedent and consequent parameters in the TSK-FS model. First, they applied an FCM-based clustering transfer technique to the antecedent parameters, which means that the antecedent parameters can be learned from both the source and target domains. Second, they introduced an enhanced knowledge-leverage mechanism to learn the consequent parameters. Another knowledge-leverage term is then introduced to make more effective use of the knowledge in the source domain. Furthermore, they applied and modified these methods so that they could be used for analysis in scenarios with insufficient data, such as recognizing EEG signals [179], [180], [181], [182], [183], [184] or with situations involving multiple-source domains [183]. The aim of transfer representation learning is to learn a shared space that matches the distributions of instances from both domains. However, transfer representation learning based on kernels suffers from some shortcomings, such as a lack of interpretability and difficulties with selecting a kernel function. To overcome these issues, Xu et al. [185] proposed a new transfer representation learning method that uses the TSK-FS instead of kernel functions to realize nonlinear transformations. In this approach, instances from both domains are transformed into a fuzzy feature space to minimize the differences between the distributions. Meanwhile, any discriminant information or geometric properties are preserved using latent Dirichlet allocation and principal component analysis.

Notably, Zuo et al. [186] devised a new way of constructing a TSK-FS model for regression tasks. This model uses data from the source domain to construct fuzzy rules and then modifies these rules using a nonlinear continuous function based on sigmoid functions to estimate values in the target domain. To address any significant difference in the label distribution between the source and target domains, Zuo et al. [187] developed some fuzzy-system-based domain adaptation models for classification tasks. In [188], they applied granular computing techniques to transfer learning and proposed a comprehensive domain adaptation framework based on a Takagi–Sugeno fuzzy model to handle three different regression scenarios: one where the source and target domains share different conditions, one where they share different conclusions, and one where both apply. Moreover, they identified two issues in fuzzy transfer learning that had not yet been resolved: how to choose an appropriate source domain and how to efficiently select labeled data for the target domain when the target data structure is unbalanced. The solutions, which involve an innovative method again based on a Takagi–Sugeno fuzzy model [189], combine an infinite Gaussian mixture model with active learning to improve the performance and generalizability of the initial model. Li et al. [190] designed a new transfer learning model for multisource domain adaptation that relies on a fuzzy-rule-based DNN. To address the more challenging problem in multisource domain adaptation where no source data are available, Li et al. [191] proposed a new model based on a DNN with fuzzy rules.

Importantly, all the domain adaptation studies mentioned so far only work when both domains have identical feature spaces and the same number of fuzzy rules, i.e., they are all methods

of homogeneous domain adaptation. Zuo et al. [192], however, devised a novel approach to heterogeneous scenarios based on a Takagi–Sugeno fuzzy model. In this framework, fuzzy rules are constructed in the source domain and then transferred to the target domain using canonical correlation analysis so as to minimize the discrepancy between the feature spaces of the two domains. This was the first article to solve heterogeneous domain adaptation problems using a fuzzy-rule-based system. Subsequently, Lu et al. [16] addressed the more challenging scenario of when the only available instances to build the model span multiple source domains. They proposed two novel transfer learning methods for regression tasks based on a Takagi–Sugeno fuzzy model—one for when the feature spaces are homogeneous and one for when the spaces are heterogeneous. In the former, knowledge from multiple source domains is merged in the form of fuzzy rules, while, in the latter, knowledge is merged in the form of both data and fuzzy rules. Che et al.’s [193] fuzzy transfer learning method addresses multioutput regression problems in both homogeneous and heterogeneous scenarios. Their approach applies fuzzy rules to accurately capture the commonalities and characteristics of multiple numerical output variables.

In summary, most of the above methods share a common model construction framework: they begin by constructing a fuzzy-rule-based model on the source data (e.g., a TSK-FS) and subsequently modify the existing model (fuzzy rules) to establish a new fuzzy model for the target domain. Fuzzy-rule-based systems provide a linguistic representation of knowledge, enabling generalization and adaptation, while also making the model more robust to domain shift. Their power to transfer relevant knowledge also helps to improve a model’s interpretability. All these characteristics make fuzzy-rule-based systems well suited to transfer learning tasks—particularly, the more challenging tasks, such as heterogeneous domain adaptation and source-free domain adaptation.

C. Transfer Learning Based on Fuzzy Relations

Most studies mentioned so far focus on supervised or semisupervised transfer learning in homogeneous scenarios, where both the source and target domains have labeled instances and only their data distributions are different. However, it is not uncommon in the real world for there to be no available labeled instances in the target domain. Furthermore, the feature spaces of the source and target domains will usually be different. This scenario, which is characterized by a high degree of uncertainty, is commonly referred to as heterogeneous unsupervised domain adaptation (HeUDA). Recently, researchers have developed n -dimensional fuzzy geometry theory [194] and fuzzy equivalence relations [195] to analyze and handle such problems with uncertainty.

Liu et al.’s [18] solution to HeUDA problems, called F-HeUDA, is to use fuzzy geometry to measure the similarity of features between the source and target domains. Shared fuzzy equivalence relations are then introduced, which means that both domains will share the same number of clustering categories. Hence, knowledge can be transferred from a heterogeneous

source domain to a target domain with only unlabeled data. Using these techniques, F-HeUDA outperformed the SOTA models on four real datasets and performed especially well when the target domain had very few instances. Moreover, Liu et al. [17], [196] focused on a more realistic problem called the multisource HeUDA problem. Solving this problem involves transferring knowledge from several different source domains that have labeled data but heterogeneous dimensions and one target domain with unlabeled data. Their approach, called a shared fuzzy equivalence relations neural network, improves upon previous work in shared fuzzy equivalence relations to extract the shared fuzzy information contained in multiple heterogeneous domains.

In summary, because there is a high degree of uncertainty when transferring knowledge from a heterogeneous source domain to a target domain with only unlabeled data, nonfuzzy models will not usually perform well. Fuzzy relations offer a flexible, interpretable, and adaptable framework for representing and transferring knowledge between such domains. Hence, researchers tend to apply fuzzy relations to improve transfer efficiency in heterogeneous situations.

V. FUZZY DATA STREAM LEARNING

Learning from data streams [19], [20] involves developing algorithms and techniques to adaptively and incrementally process and learn from continuously arriving data. Unlike traditional machine learning scenarios where a static dataset is available for offline training, data stream learning deals with dynamic, evolving data streams that may not be stored entirely. However, data streams often exhibit concept drift, which refers to changes in the statistical properties of the data. Detecting and adapting to concept drift are two important challenges in data stream learning. One approach is to continuously monitor the data and update models or retrain them periodically to account for changes. Another approach is to use online learning techniques that can adapt to changes in the data stream in real time. While concept drift often come with some uncertainty problems—for example, making predictions from data streams with mixed drift problems and detecting drift in data streams with missing values—researchers are considering the application of fuzzy techniques to address these challenges.

The aim of concept drift detection is to identify when concept drift has occurred so that appropriate measures can be taken to update or retrain the models in question. Several research teams have turned to FCM-based methods to detect concept drift [201], [202]. These two methods derive fuzzy membership functions from the data stream and use the membership results to mine concept drift patterns. Zhang et al. [206] designed a new drift detection model based on fuzzy set theory to address drift problems associated with user interests for recommender systems, while Dong et al. [207] developed a data-distribution-based drift detection method for business intelligence and data-driven decision support systems that incorporates fuzzy set theory. In both these methods, fuzzy set theory is used to handle the challenging issue of where an item’s features and its related information are usually incomplete and imprecise. Along these lines, Liu et al. [222] proposed a robust drift detection algorithm

that can handle missing values. This algorithm comprises a masked distance learning algorithm to reduce the cumulative errors caused by missing values and a fuzzy-weighted frequency method to identify discrepancies in the data distribution.

Concept drift adaptation refers to the process of updating or modifying a machine learning model in response to concept drift so that it remains accurate and effective over time. Over the past five years, many new adaptation models that fuse fuzzy techniques with machine learning algorithms have been built to deal with the phenomenon of concept drift. The applied fuzzy techniques include fuzzy clustering algorithms [24], [203], [204], [205], fuzzy-rule-based systems [208], [209], [210], [211], and fuzzy time series (FTS) [220], [221]. Song et al. [24], [203], [204] proposed a series of kernel FCM-based adaptive models to handle data stream regression problems with concept drift. In [203] and [204], kernel FCM is used to determine the most relevant learning set, while, in [24], kernel FCM is used to measure the degree to which upcoming examples belong to different patterns. These fuzzy membership values are then embedded in the learning process to handle mixed drift data streams.

In terms of applying fuzzy-rule-based systems, Garcia et al. [210] developed a modified evolving granular fuzzy-rule-based model that incorporates an incremental learning algorithm to simultaneously impute missing data as well as adapt the model's parameters and structure over time. García-Vico et al. [211] proposed an evolutionary fuzzy system to extract knowledge from data streams as a way to adapt to concept drift. Both these methods use type-1 fuzzy systems; however, by contrast, Pratama et al. [208] proposed an evolving type-2 recurrent FNN to simultaneously address three challenges: data uncertainty, temporal behavior, and system absence. FTS [228] is a mathematical framework that combines fuzzy logic and time-series analysis to model and forecast uncertain and imprecise data over time. FTS is particularly useful in situations where the data have missing values, outliers, or noise, and where traditional time-series models may not perform well. de Lima e Silva et al. [220] introduced a nonstationary FTS, while Severiano et al. [221] introduced an evolving forecasting model based on FTS to deal with concept drift. Moreover, Liu et al. [223] proposed a new concept drift adaptation method based on a fuzzy windowing approach. Unlike traditional windowing methods, this approach employs sliding windows with an overlapping period to enable precise identification of the data instances that belong to different concepts. Focusing on multiple relevant data stream regression with concept drift, Song et al. [224] developed a new adaptation model based on fuzzy drift variance, where the variance is designed to measure the correlated drift patterns among streams.

In addition, several works simultaneously address concept drift detection and adaptation [212], [213], [225], [226]. For example, Dong et al. [225] introduced an adaptive ensemble algorithm based on fuzzy instance weighting to handle data streams involving concept drift. Yu et al. [213] presented an evolving neuro-fuzzy system for streaming data regression that employs an online topology learning algorithm to self-organize each layer of the proposed system. To effectively detect drift

TABLE III
SUMMARY OF THE SOTA ACHIEVEMENTS IN FUZZY DATA STREAM LEARNING

Fuzzy techniques	Type				No.
	Detection	Adaptation	Detection and adaptation	Others	
Fuzzy clustering	[201] [202]	[203] [204] [24] [205]	-	-	6
Fuzzy set theory	[206] [207]	-	-	-	2
Fuzzy systems	-	[208] [209] [210] [211]	[212] [213]	[214] [215] [216] [217] [218] [219]	12
Fuzzy time series	-	[220] [221]	-	-	2
Others	[222]	[223] [224]	[225] [226]	[227]	6

and adapt the learned model, Zhang et al. [226] proposed a novel approach that combines a dynamic intuitionistic fuzzy cognitive map scheme and a concept drift detection algorithm.

More recently, researchers have used fuzzy techniques to address data stream classification and regression problems. These techniques include evolving fuzzy systems [214], [215], [216], neuro-fuzzy systems [217], granular fuzzy-rule-based systems [218], [219], and the fuzzy time-matching method [227]. Not only can these techniques help to improve the performance of streaming data classification and regression in uncertain environments, they can also be applied to handle the phenomenon of concept drift. Table III summarizes these recent achievements in the field of fuzzy data stream learning.

In summary, fuzzy techniques are applied in data stream learning, especially to handle concept drift scenarios, owing to their capacity to handle uncertainty, adapt to changing patterns, and provide interpretable models. These features make fuzzy techniques valuable for detecting, understanding, and adapting to concept drift, leading to better performance than nonfuzzy methods.

VI. FUZZY REINFORCEMENT LEARNING

RL [27] represents a powerful paradigm in machine learning, where agents learn to make decisions through interaction with an environment, guided by a system of rewards or penalties. However, the traditional RL framework is not without its challenges, especially in scenarios where the training process is inherently slow due to complex and uncertain environments [229] or sparse reward signals [230]. Fuzzy RL emerges as a promising approach to address these limitations, leveraging fuzzy logic to enhance training efficiency and overcome the hurdles associated with slow reinforcement processes.

One of the primary advantages of fuzzy RL lies in its adaptability to dynamic (uncertain) environments. In traditional RL, slow training processes can be exacerbated by the challenges posed by dynamic scenarios where the optimal strategy may change rapidly. Fuzzy logic allows the system to gracefully adapt to these changes, incorporating fuzzy rules that capture the gradual transitions and uncertainties in the environment. In addition, in many RL applications, the scarcity of meaningful rewards can impede the learning process, leading to slow convergence or even stagnation. Fuzzy RL introduces the concept of fuzzy rewards [31], enabling the system to consider partial or intermediate successes that may not be fully captured by binary

reward signals. This approach helps mitigate the challenge of sparse rewards by providing a more nuanced and continuous feedback mechanism, allowing the agent to learn from a broader spectrum of experiences.

Fuzzy Sarsa learning (FSL) [31] is a critic-only fuzzy RL algorithm that combines the Sarsa algorithm with fuzzy logic. In traditional Sarsa learning, an agent learns to take actions through trial and error that maximize a reward signal in a given environment. In FSL, the state and action spaces are represented as fuzzy sets, which allows for a more gradual transition between states and actions, rather than strict boundaries. The algorithm updates the Q -value function based on the fuzzy membership functions of the current state and action, as well as the fuzzy reward function. The use of fuzzy logic allows FSL to handle more complex environments with uncertain or imprecise information, while still maintaining a high level of performance. As an example, Fathinezhad et al. [237] proposed a novel method of robot navigation that combines supervised learning and FSL. Their method applies a zero order Takagi–Sugeno fuzzy controller with some candidate actions for each rule as the main module. Also, Hein et al. [238] developed a new particle swarm approach to RL based on fuzzy controllers. This approach builds fuzzy RL policies by training parameters on world models that simulate real system dynamics. Furthermore, Shi et al. [240] developed an adaptive fuzzy comprehensive evaluation method that integrates a fuzzy analytical hierarchy process, a Bayesian network, and RL. The authors successfully applied this method to a robot soccer system, which is a typical complex time-sequence decision-making system.

In the field of control systems, Zhang et al. [231] designed a new fault-tolerant control algorithm by combining RL with a fuzzy augmented model for partially unknown systems with actuator faults. The fuzzy augmented model was inspired by the well-known Takagi–Sugeno fuzzy model. With this algorithm, less information needs to be transmitted, which reduces computational loads during the learning process, even when dynamic matrices are partially unknown. Similarly, Zhang et al. [232] proposed a novel parallel tracking control optimization algorithm using fuzzy RL techniques for partially unknown fuzzy interconnected systems. This algorithm uses the precompensation technique to treat working feedback controls as reconstructed dynamics with virtual controls. This approach to building the model results in a new augmented and interconnected fuzzy tracking system where a valid performance index is guaranteed for optimal control. In the realm of traffic light control systems, Kumar et al. [233] proposed a novel system that is both dynamic and intelligent to overcome issues with long waiting times, fuel waste, and rising carbon emissions. Traditional traffic light systems operate on a fixed duration mode, whereas Kumar’s proposed system uses a deep RL model to switch the lights and a fuzzy inference system to select one among three modes based on current traffic information. To mitigate frequency deviations caused by power fluctuations, Yin and Li [239] developed a fuzzy vector RL approach to control how much power a power system generates. The framework also considers flywheel energy storage systems.

TABLE IV
SUMMARY OF THE SOTA ACHIEVEMENTS IN FUZZY RL

Fuzzy techniques	Type			No.
	Control systems	Multiagent RL	Others	
Fuzzy systems	[231] [232] [233]	[234] [235] [236]	[237] [238]	8
Others	[239]	-	[240]	2

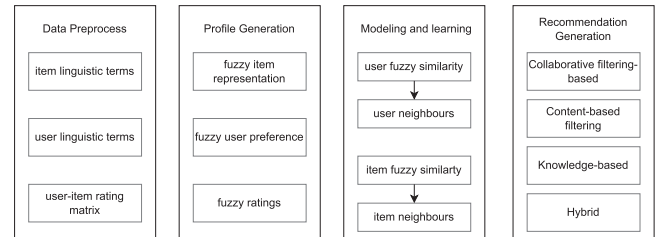


Fig. 3. Fuzzy recommender system framework.

Turning to large-scale multiagent RL, Li et al. [234] introduced the concept of fuzzy agents to be used for training homogeneous agents. They also proposed a new RL method that uses fuzzy logic to learn abstract policies. In comparison to other simplification methods, their fuzzy agents both reduce the computing resources required to train a model and ensure that an effective policy is learned. Zhu et al. [235] devised a new control strategy based on RL and a fuzzy wavelet network. The aim here is to improve the stability of the hybrid system’s buffer compliance control. To reduce the negative effects of noisy information in communication channels on multiagent RL, Fang et al. [236] developed a two-stream fused fuzzy DNN by applying a fuzzy inference module and a DNN module. Experiments with two large-scale traffic signal control environments demonstrate the proposed method’s superior performance. Table IV summarizes these recent achievements in the field of fuzzy RL.

In general, by combining RL and fuzzy logic, fuzzy RL can handle the complexity of real-world environments that involve uncertain information and imprecise data, making it a promising technique for solving problems in fields such as robotics, control systems, and game theory.

VII. FUZZY RECOMMENDER SYSTEMS

In real-world recommender systems, descriptions of user preferences and item features, item values, and business knowledge are often vague, imprecise, and plagued with uncertainty. And, further, these issues can occur across the entire recommendation process from collecting the data to generating the recommendations. Other key problems that can occur with recommender systems include sparsely populated user-item matrices and problems with measuring the similarity of items and users (see Fig. 3). Commonly used fuzzy techniques to deal with these issues include intuitionistic fuzzy sets [241], fuzzy user profiles [242], fuzzy-rule-based systems [243], and fuzzy similarity [244]. This section provides a summary of recent articles focused on these techniques.

TABLE V
SUMMARY OF THE SOTA FUZZY-TECHNIQUE-BASED RECOMMENDER
SYSTEM ACHIEVEMENTS

Fuzzy techniques	Type				No.
	Collaborative	Content-Based	Knowledge-Based	Hybrid	
Fuzzy systems	[248] [254] [255]	[256]	[257] [250] [251] [258] [259] [260]	[261] [262]	12
Intuitionistic fuzzy set	[263] [264]	-	-	-	2
Fuzzy clustering	[245] [246] [247]	-	-	-	3
Fuzzy profile	[265] [266]	-	-	-	2
Others	[267] [265]	[268] [249]	[269] [270] [271] [271] [272]	[273] [274] [275] [253]	13

Collaborative filtering is a key approach to recommender systems. However, traditional collaborative filtering methods, such as unsupervised clustering, are quite sensitive to uncertainty and therefore often experience high error rates. Once again, FCM or modified FCM algorithms have been implemented to eliminate these issues [245], [246], [247]. For example, FCM has been used to classify the users in a dataset according to the similarity of their item ratings. To improve the quality of recommender systems with sparse datasets, Nilashi et al. [248] designed a hybrid item similarity model that combines an adjusted Google similarity with an intuitionistic Kullback–Leibler similarity based on fuzzy sets. This approach essentially makes a tradeoff between prediction accuracy and efficiency.

In terms of content-based filtering recommender systems, Yera et al.'s [249] solution uses a fuzzy decision tree to match the most appropriate function in the individual recommendation aggregation step. Other researchers have also relied on fuzzy-rule-based systems to extract relevant knowledge from uncertain data to improve the performance of knowledge-based recommender systems [250], [251], [252].

Hybrid recommender systems are another area of research progress. Here, Walek and Fajmon [253] designed a new hybrid recommender system that combines a collaborative filtering system, a content-based filtering system, and a fuzzy expert system to enhance recommendation performance. The fuzzy expert system is used to evaluate the importance of the recommended products with vague information and rank them appropriately for users. Table V summarizes these recent studies in the field of fuzzy-based recommender systems.

In summary, fuzzy techniques provide a rich spectrum of methods for managing uncertainty, vagueness, and imprecision in data both during the learning process and when making recommendations. Particularly, fuzzy techniques are well suited to handling imprecise user preference descriptions (e.g., in linguistic terms), knowledge description, and the gradual accumulation of user preference profiles. Therefore, applying fuzzy techniques in the recommender system can bring more efficient and accurate performance than nonfuzzy models.

VIII. FUTURE RESEARCH DIRECTIONS

So far, we have summarized recent achievements of FML. In this section, we aim to give further discussion of FML's current

research trends and share some insights on future research directions.

A. Fuzzy Classic Machine Learning

Most current research in fuzzy classic machine learning mainly focuses on the following aspects: 1) handling noisy or incomplete data; 2) addressing imbalanced datasets; and 3) enhancing algorithms' interpretability and robustness. Analyzing imprecise data (fuzzy-valued or interval-valued) [84] has not received widespread attention. However, in many real-world scenarios, we will inevitably encounter this kind of data. Therefore, it would be a promising direction to investigate how to apply fuzzy logic to analyze imprecise data.

Moreover, deep learning [86] has made significant strides, but it still faces several challenges. DNNs, particularly complex architectures like deep convolutional or recurrent networks, are often viewed as black boxes. Understanding how these models arrive at specific decisions is crucial, especially in applications where interpretability is essential, such as health care and finance. In addition, deep learning models are vulnerable to adversarial attacks [276], where small carefully crafted perturbations to input data can lead to misclassification. Fuzzy techniques are potential tools to overcome these challenges. We suggest future work that uses fuzzy techniques to overcome these challenges.

B. Fuzzy Transfer Learning

Recent fuzzy transfer learning works [191], [277] mainly focus on applying fuzzy-rule-based systems to model the uncertainty and variability between different source and target domains, enabling more effective adaptation of knowledge from the source to the target domain. However, open-set problems [165], [278] have gain more and more attention in transfer learning, where target domain contain private categories. Detecting unknown classes is a challenging problem that contains a large degree of uncertainty. We believe that applying fuzzy techniques to address this challenge problem is worth investigating for future work.

C. Fuzzy Data Stream Learning

A couple of recent works [222], [224] in fuzzy data stream learning are focused on developing adaptive fuzzy models that can effectively handle concept drift in data streams. Learning from multiple stream [20] is a crucial and challenge problem in data stream learning, especially when streams have different rates, arrive asynchronously, or experience delays. Streams may vary in terms of data types, formats, and modalities. In addition, there is an uncertain relationship between each pair of streams. Traditional machine learning algorithms face difficulty in addressing these challenges. Therefore, we recommend that researchers use fuzzy techniques in future studies to tackle these issues.

D. Fuzzy Reinforcement Learning

Recent research [233], [237] is mainly focused on integrating fuzzy systems with RL for improved performance in complex

and dynamic environments. Research is exploring the integration of fuzzy logic into Q -learning algorithms to handle uncertainties in estimating state–action values. Furthermore, fuzzy logic is applied to model and handle uncertain or imprecise reward signals in RL. However, in multiagent RL [234], capturing complex relationships and dependencies between agents while maintaining a scalable and efficient learning process is a key challenge. In addition, agents in a multiagent system may have diverse capabilities, objectives, or learning speeds. Coordinating heterogeneous agents and ensuring fair and effective collaboration is another challenging problem. We believe that it would be a promising direction to investigate how to apply fuzzy techniques to address these challenges.

E. Fuzzy Recommender Systems

Fuzzy techniques are mainly used to handling imprecise user preference descriptions (e.g., in linguistic terms), knowledge description, and the gradual accumulation of user preference profiles in fuzzy recommender systems [260], [264]. Cross-domain recommendations [279], where recommendations are made across different domains or platforms, present several challenges due to the diversity and heterogeneity between domains. Different domains may have distinct characteristics, user behaviors, and item features. Moreover, there will be uncertain relationships between different domains. Applying fuzzy techniques to address these challenges in cross-domain recommendations is promising in future work.

IX. SUMMARY

In this article, we reviewed recent developments across the five main research streams of FML. Our review shows that fuzzy techniques can significantly improve machine learning algorithms by providing a way to handle different uncertainty situations. The main improvements are reflected in the following five aspects: 1) enhancing the representation of the inputs; 2) improving the learning process of different machine learning algorithms; 3) enhancing measurement accuracy and reliability; 4) improving the accuracy of the matching function; and 5) enhancing the performance (e.g., accuracy, robustness, and interpretability) of the output results.

In future research, several new directions in the field of FML warrant thorough consideration; for instance, applying fuzzy techniques to address open-set transfer learning problems, where the target domain encompasses classes that are unknown in the source domain. In addition, multistream learning, multiagent RL, and cross-domain recommendations are three challenge problems that are far from being solved. They all involve intricate relationships and heterogeneous information, posing difficulties for traditional machine learning algorithms. Fuzzy techniques emerge as promising tools for investigating and addressing these complex problems.

We believe that this survey can provide researchers with SOTA knowledge on machine learning based on fuzzy techniques and give a guide on future research directions in the field of FML.

REFERENCES

- [1] D. J. Dubois, *Fuzzy Sets and Systems: Theory and Applications*, vol. 144. New York, NY, USA: Academic, 1980.
- [2] H. C. Wu, "Probability density functions of fuzzy random variables," *Fuzzy Sets Syst.*, vol. 105, no. 1, pp. 139–158, 1999.
- [3] T. Takagi and M. Sugeno, "Fuzzy identification of systems and its applications to modeling and control," *IEEE Trans. Syst., Man, Cybern.*, vol. SMC-15, no. 1, pp. 116–132, Jan./Feb. 1985.
- [4] L. Zhu, F.-L. Chung, and S. Wang, "Generalized fuzzy c-means clustering algorithm with improved fuzzy partitions," *IEEE Trans. Syst., Man, Cybern. B, Cybern.*, vol. 39, no. 3, pp. 578–591, Jun. 2009.
- [5] E. Czogala, J. Drewniak, and W. Pedrycz, "Fuzzy relation equations on a finite set," *Fuzzy Sets Syst.*, vol. 7, no. 1, pp. 89–101, 1982.
- [6] M. Sugeno, "Fuzzy measure and fuzzy integral," *Trans. Soc. Instrum. Control Eng.*, vol. 8, no. 2, pp. 218–226, 1972.
- [7] W. Wen, J. Li, S. Lin, J. Chen, and S. Chang, "A fuzzy-matching model with grid reduction for lithography hotspot detection," *IEEE Trans. Comput.-Aided Des. Integr. Circuits Syst.*, vol. 33, no. 11, pp. 1671–1680, Nov. 2014.
- [8] M. Luhandjula, "Fuzzy optimization: An appraisal," *Fuzzy Sets Syst.*, vol. 30, no. 3, pp. 257–282, 1989.
- [9] L. A. Zadeh, "Fuzzy sets," *Inf. Control*, vol. 8, no. 3, pp. 338–353, 1965.
- [10] H. Zimmermann, *Fuzzy Set Theory—and its Applications*. New York, NY, USA: Springer, 2011.
- [11] G. Ma, J. Lu, F. Liu, Z. Fang, and G. Zhang, "Multiclass classification with fuzzy-feature observations: Theory and algorithms," *IEEE Trans. Cybern.*, vol. 54, no. 2, pp. 1048–1061, Feb. 2024.
- [12] A. Baraldi and P. Blonda, "A survey of fuzzy clustering algorithms for pattern recognition. I," *IEEE Trans. Syst., Man, Cybern. B, Cybern.*, vol. 29, no. 6, pp. 778–785, Dec. 1999.
- [13] I. Škrjanc, J. A. Iglesias, A. Sanchis, D. Leite, E. Lughofer, and F. Gomide, "Evolving fuzzy and neuro-fuzzy approaches in clustering, regression, identification, and classification: A survey," *Inf. Sci.*, vol. 490, pp. 344–368, 2019.
- [14] Y. Zheng, Z. Xu, and X. Wang, "The fusion of deep learning and fuzzy systems: A state-of-the-art survey," *IEEE Trans. Fuzzy Syst.*, vol. 30, no. 8, pp. 2783–2799, Aug. 2022.
- [15] S. J. Pan and Q. Yang, "A survey on transfer learning," *IEEE Trans. Knowl. Data Eng.*, vol. 22, no. 10, pp. 1345–1359, Oct. 2010.
- [16] J. Lu, H. Zuo, and G. Zhang, "Fuzzy multiple-source transfer learning," *IEEE Trans. Fuzzy Syst.*, vol. 28, no. 12, pp. 3418–3431, Dec. 2020.
- [17] F. Liu, G. Zhang, and J. Lu, "Multi-source heterogeneous unsupervised domain adaptation via fuzzy-relation neural networks," *IEEE Trans. Fuzzy Syst.*, vol. 29, no. 11, pp. 3308–3322, Nov. 2021.
- [18] F. Liu, J. Lu, and G. Zhang, "Unsupervised heterogeneous domain adaptation via shared fuzzy equivalence relations," *IEEE Trans. Fuzzy Syst.*, vol. 26, no. 6, pp. 3555–3568, Dec. 2018.
- [19] Y. Sun, K. Tang, L. L. Minku, S. Wang, and X. Yao, "Online ensemble learning of data streams with gradually evolved classes," *IEEE Trans. Knowl. Data Eng.*, vol. 28, no. 6, pp. 1532–1545, Jun. 2016.
- [20] M. Zhou, J. Lu, Y. Song, and G. Zhang, "Multi-stream concept drift self-adaptation using graph neural network," *IEEE Trans. Knowl. Data Eng.*, vol. 35, no. 12, pp. 12828–12841, Dec. 2023.
- [21] J. C. Schlimmer and R. H. Granger, "Incremental learning from noisy data," *Mach. Learn.*, vol. 1, pp. 317–354, 1986.
- [22] J. Gama, I. Žliobaitė, A. Bifet, M. Pechenizkiy, and A. Bouchachia, "A survey on concept drift adaptation," *ACM Comput. Surv.*, vol. 46, no. 4, pp. 1–37, 2014.
- [23] J. Lu, A. Liu, F. Dong, F. Gu, J. Gama, and G. Zhang, "Learning under concept drift: A review," *IEEE Trans. Knowl. Data Eng.*, vol. 31, no. 12, pp. 2346–2363, Dec. 2019.
- [24] Y. Song, J. Lu, H. Lu, and G. Zhang, "Fuzzy clustering-based adaptive regression for drifting data streams," *IEEE Trans. Fuzzy Syst.*, vol. 28, no. 3, pp. 544–557, Mar. 2020.
- [25] J. C. Dunn, "A fuzzy relative of the isodata process and its use in detecting compact well-separated clusters," *J. Cybern.*, vol. 3, no. 3, pp. 32–57, 1973.
- [26] X. Yang, G. Zhang, J. Lu, and J. Ma, "A kernel fuzzy c-means clustering-based fuzzy support vector machine algorithm for classification problems with outliers or noises," *IEEE Trans. Fuzzy Syst.*, vol. 19, no. 1, pp. 105–115, Feb. 2011.
- [27] R. S. Sutton and A. G. Barto, *Reinforcement Learning: An Introduction*. Cambridge, MA, USA: MIT Press, 2018.

- [28] P. Kormushev, S. Calinon, and D. G. Caldwell, "Reinforcement learning in robotics: Applications and real-world challenges," *Robotics*, vol. 2, no. 3, pp. 122–148, 2013.
- [29] A. Goldwasser and M. Thielscher, "Deep reinforcement learning for general game playing," in *Proc. AAAI Conf. Artif. Intell.*, 2020, pp. 1701–1708.
- [30] B. R. Kiran et al., "Deep reinforcement learning for autonomous driving: A survey," *IEEE Trans. Intell. Transp. Syst.*, vol. 23, no. 6, pp. 4909–4926, Jun. 2022.
- [31] M. J. Er and C. Deng, "Online tuning of fuzzy inference systems using dynamic fuzzy Q-learning," *IEEE Trans. Syst., Man, Cybern. B, Cybern.*, vol. 34, no. 3, pp. 1478–1489, Jun. 2004.
- [32] X. Ma, Z. Sun, and Y. He, "Analysis and design of fuzzy controller and fuzzy observer," *IEEE Trans. Fuzzy Syst.*, vol. 6, no. 1, pp. 41–51, Feb. 1998.
- [33] L. Jouffe, "Fuzzy inference system learning by reinforcement methods," *IEEE Trans. Syst., Man, Cybern. C, Appl. Rev.*, vol. 28, no. 3, pp. 338–355, Aug. 1998.
- [34] P. Y. Glorennec and L. Jouffe, "Fuzzy Q-learning," in *Proc. 6th Int. Fuzzy Syst. Conf.*, 1997, pp. 659–662.
- [35] J. Bobadilla, F. Ortega, A. Hernandez, and A. Gutiérrez, "Recommender systems survey," *Knowl.-Based Syst.*, vol. 46, pp. 109–132, 2013.
- [36] J. Lu, D. Wu, M. Mao, W. Wang, and G. Zhang, "Recommender system application developments: A survey," *Decis. Support Syst.*, vol. 74, pp. 12–32, 2015.
- [37] R. R. Yager, "Fuzzy logic methods in recommender systems," *Fuzzy Sets Syst.*, vol. 136, no. 2, pp. 133–149, 2003.
- [38] R. Yera and L. Martínez, "Fuzzy tools in recommender systems: A survey," *Int. J. Comput. Intell. Syst.*, vol. 10, no. 1, pp. 776–803, 2017.
- [39] M. Yang, "A survey of fuzzy clustering," *Math. Comput. Model.*, vol. 18, no. 11, pp. 1–16, 1993.
- [40] E. H. Ruspini, J. C. Bezdek, and J. M. Keller, "Fuzzy clustering: A historical perspective," *IEEE Comput. Intell. Mag.*, vol. 14, no. 1, pp. 45–55, Feb. 2019.
- [41] J. C. Bezdek, R. Ehrlich, and W. Full, "FCM: The fuzzy c-means clustering algorithm," *Comput. Geosci.*, vol. 10, nos. 2/3, pp. 191–203, 1984.
- [42] Y. Ding and X. Fu, "Kernel-based fuzzy c-means clustering algorithm based on genetic algorithm," *Neurocomputing*, vol. 188, pp. 233–238, 2016.
- [43] T. Lei, X. Jia, Y. Zhang, L. He, H. Meng, and A. K. Nandi, "Significantly fast and robust fuzzy c-means clustering algorithm based on morphological reconstruction and membership filtering," *IEEE Trans. Fuzzy Syst.*, vol. 26, no. 5, pp. 3027–3041, Oct. 2018.
- [44] P. K. Mishro, S. Agrawal, R. Panda, and A. Abraham, "A novel type-2 fuzzy c-means clustering for brain MR image segmentation," *IEEE Trans. Cybern.*, vol. 51, no. 8, pp. 3901–3912, Aug. 2021.
- [45] J. Zhou et al., "Projected fuzzy c-means clustering with locality preservation," *Pattern Recognit.*, vol. 113, 2021, Art. no. 107748.
- [46] Y. Gao, Z. Wang, J. Xie, and J. Pan, "A new robust fuzzy c-means clustering method based on adaptive elastic distance," *Knowl.-Based Syst.*, vol. 237, 2022, Art. no. 107769.
- [47] T. Lei, P. Liu, X. Jia, X. Zhang, H. Meng, and A. K. Nandi, "Automatic fuzzy clustering framework for image segmentation," *IEEE Trans. Fuzzy Syst.*, vol. 28, no. 9, pp. 2078–2092, Sep. 2020.
- [48] L. Jiao, H. Yang, Z. Liu, and Q. Pan, "Interpretable fuzzy clustering using unsupervised fuzzy decision trees," *Inf. Sci.*, vol. 611, pp. 540–563, 2022.
- [49] J. W. Sangma, Yogita, V. Pal, N. Kumar, and R. Kushwaha, "FHC-NDS: Fuzzy hierarchical clustering of multiple nominal data streams," *IEEE Trans. Fuzzy Syst.*, vol. 31, no. 3, pp. 786–798, Mar. 2023.
- [50] N. Chukhrova and A. Johannssen, "Fuzzy regression analysis: Systematic review and bibliography," *Appl. Soft Comput.*, vol. 84, 2019, Art. no. 105708.
- [51] L. A. Zadeh, "The concept of a linguistic variable and its application to approximate reasoning—I," *Inf. Sci.*, vol. 8, no. 3, pp. 199–249, 1975.
- [52] D. H. Hong and C. Hwang, "Support vector fuzzy regression machines," *Fuzzy Sets Syst.*, vol. 138, no. 2, pp. 271–281, 2003.
- [53] J. Lu, X. Yang, and G. Zhang, "Support vector machine based approach in situation assessment," *Dyn. Continuous Discrete Impulsive Syst.-Ser. B—Appl. Algorithms*, vol. 13, no. 5, pp. 41–45, 2006.
- [54] J. Lu, X. Yang, and G. Zhang, "Support vector machine-based multi-source multi-attribute information integration for situation assessment," *Expert Syst. Appl.*, vol. 34, no. 2, pp. 1333–1340, 2008.
- [55] J. P. Dunyak and D. Wunsch, "Fuzzy regression by fuzzy number neural networks," *Fuzzy Sets Syst.*, vol. 112, no. 3, pp. 371–380, 2000.
- [56] D. Zhang, L. Deng, K. Cai, and A. So, "Fuzzy nonlinear regression with fuzzified radial basis function network," *IEEE Trans. Fuzzy Syst.*, vol. 13, no. 6, pp. 742–760, Dec. 2005.
- [57] M. Mosleh, M. Otadi, and S. Abbasbandy, "Fuzzy polynomial regression with fuzzy neural networks," *Appl. Math. Model.*, vol. 35, no. 11, pp. 5400–5412, 2011.
- [58] S. Roh, T. Ahn, and W. Pedrycz, "Fuzzy linear regression based on polynomial neural networks," *Expert Syst. Appl.*, vol. 39, no. 10, pp. 8909–8928, 2012.
- [59] H. Tanaka and H. Lee, "Interval regression analysis by quadratic programming approach," *IEEE Trans. Fuzzy Syst.*, vol. 6, no. 4, pp. 473–481, Nov. 1998.
- [60] D. Hong and C. Hwang, "Interval regression analysis using quadratic loss support vector machine," *IEEE Trans. Fuzzy Syst.*, vol. 13, no. 2, pp. 229–237, Apr. 2005.
- [61] C. Hwang, D. Hong, and K. Seok, "Support vector interval regression machine for crisp input and output data," *Fuzzy Sets Syst.*, vol. 157, no. 8, pp. 1114–1125, 2006.
- [62] P. Hao, "Interval regression analysis using support vector networks," *Fuzzy Sets Syst.*, vol. 160, no. 17, pp. 2466–2485, 2009.
- [63] C. Huang, "A reduced support vector machine approach for interval regression analysis," *Inf. Sci.*, vol. 217, pp. 56–64, 2012.
- [64] Y. He, X. Wang, and J. Z. Huang, "Fuzzy nonlinear regression analysis using a random weight network," *Inf. Sci.*, vol. 364, pp. 222–240, 2016.
- [65] Y. He, C. Wei, H. Long, R. A. R. Ashfaq, and J. Z. Huang, "Random weight network-based fuzzy nonlinear regression for trapezoidal fuzzy number data," *Appl. Soft Comput.*, vol. 70, pp. 959–979, 2018.
- [66] F. Baser and H. Demirhan, "A fuzzy regression with support vector machine approach to the estimation of horizontal global solar radiation," *Energy*, vol. 123, pp. 229–240, 2017.
- [67] J. Chachi, "A weighted least squares fuzzy regression for crisp input-fuzzy output data," *IEEE Trans. Fuzzy Syst.*, vol. 27, no. 4, pp. 739–748, Apr. 2019.
- [68] S. H. Choi, H. Jung, and H. Kim, "Ridge fuzzy regression model," *Int. J. Fuzzy Syst.*, vol. 21, no. 7, pp. 2077–2090, 2019.
- [69] R. Naderkhani, M. Behzad, T. Razzaghnia, and R. Farnoosh, "Fuzzy regression analysis based on fuzzy neural networks using trapezoidal data," *Int. J. Fuzzy Syst.*, vol. 23, pp. 1267–1280, 2021.
- [70] H. Xia, J. Tang, W. Yu, C. Cui, and J. Qiao, "Takagi–Sugeno fuzzy regression trees with application to complex industrial modeling," *IEEE Trans. Fuzzy Syst.*, vol. 31, no. 7, pp. 2210–2224, Jul. 2023.
- [71] D. Zhang et al., "An interpretable station delay prediction model based on graph community neural network and time-series fuzzy decision tree," *IEEE Trans. Fuzzy Syst.*, vol. 31, no. 2, pp. 421–433, Feb. 2023.
- [72] Y. Yuan and M. J. Shaw, "Induction of fuzzy decision trees," *Fuzzy Sets Syst.*, vol. 69, no. 2, pp. 125–139, 1995.
- [73] A. Suárez and J. F. Lutsko, "Globally optimal fuzzy decision trees for classification and regression," *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 21, no. 12, pp. 1297–1311, Dec. 1999.
- [74] I. Chiang and J. Y. Hsu, "Fuzzy classification trees for data analysis," *Fuzzy Sets Syst.*, vol. 130, no. 1, pp. 87–99, 2002.
- [75] X. Wang, X. Liu, W. Pedrycz, and L. Zhang, "Fuzzy rule based decision trees," *Pattern Recognit.*, vol. 48, no. 1, pp. 50–59, 2015.
- [76] A. Segatori, F. Marcelloni, and W. Pedrycz, "On distributed fuzzy decision trees for big data," *IEEE Trans. Fuzzy Syst.*, vol. 26, no. 1, pp. 174–192, Feb. 2018.
- [77] D. Nauck and R. Kruse, "A neuro-fuzzy method to learn fuzzy classification rules from data," *Fuzzy Sets Syst.*, vol. 89, no. 3, pp. 277–288, 1997.
- [78] K. Cpalka, "A new method for design and reduction of neuro-fuzzy classification systems," *IEEE Trans. Neural Netw.*, vol. 20, no. 4, pp. 701–714, Apr. 2009.
- [79] A. Ghosh, B. U. Shankar, and S. K. Meher, "A novel approach to neuro-fuzzy classification," *Neural Netw.*, vol. 22, no. 1, pp. 100–109, 2009.
- [80] C. Juang and C.-D. Hsieh, "TS-fuzzy system-based support vector regression," *Fuzzy Sets Syst.*, vol. 160, no. 17, pp. 2486–2504, 2009.
- [81] L. Chen, M. Wu, M. Zhou, Z. Liu, J. She, and K. Hirota, "Dynamic emotion understanding in human–robot interaction based on two-layer fuzzy SVR-TS model," *IEEE Trans. Syst., Man, Cybern. Syst.*, vol. 50, no. 2, pp. 490–501, Feb. 2020.
- [82] J. Rabcan, V. Levashenko, E. Zaitseva, M. Kvassay, and S. Subbotin, "Application of fuzzy decision tree for signal classification," *IEEE Trans. Ind. Informat.*, vol. 15, no. 10, pp. 5425–5434, Oct. 2019.

- [83] G. Xue, Q. Chang, J. Wang, K. Zhang, and N. R. Pal, "An adaptive neuro-fuzzy system with integrated feature selection and rule extraction for high-dimensional classification problems," *IEEE Trans. Fuzzy Syst.*, vol. 31, no. 7, pp. 2167–2181, Jul. 2023.
- [84] G. Ma, F. Liu, G. Zhang, and J. Lu, "Learning from imprecise observations: An estimation error bound based on fuzzy random variables," in *Proc. IEEE Int. Conf. Fuzzy Syst.*, 2021, pp. 1–8.
- [85] P. Liu, S. Han, Z. Meng, and Y. Tong, "Facial expression recognition via a boosted deep belief network," in *Proc. IEEE Conf. Comput. Vis. Pattern Recognit.*, 2014, pp. 1805–1812.
- [86] J. Gu et al., "Recent advances in convolutional neural networks," *Pattern Recognit.*, vol. 77, pp. 354–377, 2018.
- [87] M. Schuster and K. K. Paliwal, "Bidirectional recurrent neural networks," *IEEE Trans. Signal Process.*, vol. 45, no. 11, pp. 2673–2681, Nov. 1997.
- [88] K. Shihabudheen and G. N. Pillai, "Recent advances in neuro-fuzzy system: A survey," *Knowl.-Based Syst.*, vol. 152, pp. 136–162, 2018.
- [89] P. V. De Campos Souza, "Fuzzy neural networks and neuro-fuzzy networks: A review the main techniques and applications used in the literature," *Appl. Soft Comput.*, vol. 92, 2020, Art. no. 106275.
- [90] L. Chen, W. Su, M. Wu, W. Pedrycz, and K. Hirota, "A fuzzy deep neural network with sparse autoencoder for emotional intention understanding in human–robot interaction," *IEEE Trans. Fuzzy Syst.*, vol. 28, no. 7, pp. 1252–1264, Jul. 2020.
- [91] H. Lu, M. Zhang, X. Xu, Y. Li, and H. T. Shen, "Deep fuzzy hashing network for efficient image retrieval," *IEEE Trans. Fuzzy Syst.*, vol. 29, no. 1, pp. 166–176, Jan. 2021.
- [92] B. Cao, J. Zhao, Z. Lv, Y. Gu, P. Yang, and S. K. Halgamuge, "Multiobjective evolution of fuzzy rough neural network via distributed parallelism for stock prediction," *IEEE Trans. Fuzzy Syst.*, vol. 28, no. 5, pp. 939–952, May 2020.
- [93] B. Cao et al., "Multiobjective evolution of the explainable fuzzy rough neural network with gene expression programming," *IEEE Trans. Fuzzy Syst.*, vol. 30, no. 10, pp. 4190–4200, Oct. 2022.
- [94] G. Sideratos, A. Ikononopoulos, and N. D. Hatzigryriou, "A novel fuzzy-based ensemble model for load forecasting using hybrid deep neural networks," *Electr. Power Syst. Res.*, vol. 178, 2020, Art. no. 106025.
- [95] A. Banerjee, P. K. Singh, and R. Sarkar, "Fuzzy integral-based CNN classifier fusion for 3D skeleton action recognition," *IEEE Trans. Circuits Syst. Video Technol.*, vol. 31, no. 6, pp. 2206–2216, Jan. 2021.
- [96] M. Hsu, Y. Chien, W. Wang, and C. Hsu, "A convolutional fuzzy neural network architecture for object classification with small training database," *Int. J. Fuzzy Syst.*, vol. 22, pp. 1–10, 2020.
- [97] C. Ge, Z. Liu, L. Fang, H. Ling, A. Zhang, and C. Yin, "A hybrid fuzzy convolutional neural network based mechanism for photovoltaic cell defect detection with electroluminescence images," *IEEE Trans. Parallel Distrib. Syst.*, vol. 32, no. 7, pp. 1653–1664, Jul. 2021.
- [98] T. Sharma, N. K. Verma, and S. Masood, "Mixed fuzzy pooling in convolutional neural networks for image classification," *Multimedia Tools Appl.*, vol. 82, no. 6, pp. 8405–8421, 2023.
- [99] K. Bhalla, D. Koundal, B. Sharma, Y. Hu, and A. Zaguia, "A fuzzy convolutional neural network for enhancing multi-focus image fusion," *J. Vis. Commun. Image Represent.*, vol. 84, 2022, Art. no. 103485.
- [100] K. Bhalla, D. Koundal, S. Bhatia, M. K. I. Rahmani, and M. Tahir, "Fusion of infrared and visible images using fuzzy based siamese convolutional network," *Comput. Mater. Continua*, vol. 70, no. 3, pp. 5503–5518, 2022.
- [101] H. Khatter and A. K. Ahlawat, "An intelligent personalized web blog searching technique using fuzzy-based feedback recurrent neural network," *Soft Comput.*, vol. 24, pp. 9321–9333, 2020.
- [102] L. Concepción, G. Nápoles, I. Grau, and W. Pedrycz, "Fuzzy-rough cognitive networks: Theoretical analysis and simpler models," *IEEE Trans. Cybern.*, vol. 52, no. 5, pp. 2994–3005, May 2022.
- [103] R. Li, Y. Hu, and Q. Liang, "T2F-LSTM method for long-term traffic volume prediction," *IEEE Trans. Fuzzy Syst.*, vol. 28, no. 12, pp. 3256–3264, Dec. 2020.
- [104] M. Bilgili, A. Yildirim, A. Ozbek, K. Celebi, and F. Ekinici, "Long short-term memory (LSTM) neural network and adaptive neuro-fuzzy inference system (ANFIS) approach in modeling renewable electricity generation forecasting," *Int. J. Green Energy*, vol. 18, no. 6, pp. 578–594, 2021.
- [105] M. Xue, H. Yan, M. Wang, H. Shen, and K. Shi, "LSTM-based intelligent fault detection for fuzzy Markov jump systems and its application to tunnel diode circuits," *IEEE Trans. Circuits Syst. II, Exp. Briefs*, vol. 69, no. 3, pp. 1099–1103, Mar. 2022.
- [106] Y. Li, Z. Tong, S. Tong, and D. Westerdahl, "A data-driven interval forecasting model for building energy prediction using attention-based LSTM and fuzzy information granulation," *Sustain. Cities Soc.*, vol. 76, 2022, Art. no. 103481.
- [107] T. Shen, J. Wang, C. Gou, and F. Wang, "Hierarchical fused model with deep learning and type-2 fuzzy learning for breast cancer diagnosis," *IEEE Trans. Fuzzy Syst.*, vol. 28, no. 12, pp. 3204–3218, Dec. 2020.
- [108] S. Kalaiselvi and V. Gomathi, " α -cut induced fuzzy deep neural network for change detection of SAR images," *Appl. Soft Comput.*, vol. 95, 2020, Art. no. 106510.
- [109] F. Özyurt, E. Sert, and D. Avci, "An expert system for brain tumor detection: Fuzzy c-means with super resolution and convolutional neural network with extreme learning machine," *Med. Hypotheses*, vol. 134, 2020, Art. no. 109433.
- [110] A. Puchkov, M. Dli, and M. Kireyenkova, "Fuzzy classification on the base of convolutional neural networks," in *Advances in Artificial Systems for Medicine and Education II*. New York, NY, USA: Springer, 2020, pp. 379–391.
- [111] C. Kang et al., "A heuristic neural network structure relying on fuzzy logic for images scoring," *IEEE Trans. Fuzzy Syst.*, vol. 29, no. 1, pp. 34–45, Jan. 2021.
- [112] G. C. Sergio and M. Lee, "Emotional video to audio transformation using deep recurrent neural networks and a neuro-fuzzy system," *Math. Problems Eng.*, vol. 2020, pp. 1–15, 2020.
- [113] G. Wang, T. Zhou, K. Choi, and J. Lu, "A deep-ensemble-level-based interpretable Takagi–Sugeno–Kang fuzzy classifier for imbalanced data," *IEEE Trans. Cybern.*, vol. 52, no. 5, pp. 3805–3818, May 2022.
- [114] M. Ghasemi, M. Kelarestaghi, F. Eshghi, and A. Sharifi, "T2-FDL: A robust sparse representation method using adaptive type-2 fuzzy dictionary learning for medical image classification," *Expert Syst. Appl.*, vol. 158, 2020, Art. no. 113500.
- [115] T. Sharma and N. K. Verma, "Estimating depth and global atmospheric light for image dehazing using type-2 fuzzy approach," *IEEE Trans. Emerg. Topics Comput. Intell.*, vol. 6, no. 1, pp. 93–102, Feb. 2022.
- [116] R. Asadi and A. C. Regan, "A spatio-temporal decomposition based deep neural network for time series forecasting," *Appl. Soft Comput.*, vol. 87, 2020, Art. no. 105963.
- [117] H. Han, H. Zhang, and J. Qiao, "Robust deep neural network using fuzzy denoising autoencoder," *Int. J. Fuzzy Syst.*, vol. 22, pp. 1356–1375, 2020.
- [118] T. Altameem, "Fuzzy rank correlation-based segmentation method and deep neural network for bone cancer identification," *Neural Comput. Appl.*, vol. 32, pp. 805–815, 2020.
- [119] F. Wang, W. Pedrycz, F. Herrera, and S. Su, "Fuzzy logic and artificial intelligence: A special issue on emerging techniques and their applications," *IEEE Trans. Fuzzy Syst.*, vol. 28, no. 12, pp. 3063–3064, Dec. 2020.
- [120] T. K. Reddy, V. Arora, V. Gupta, R. Biswas, and L. Behera, "EEG-based drowsiness detection with fuzzy independent phase-locking value representations using lagrangian-based deep neural networks," *IEEE Trans. Syst., Man, Cybern., Syst.*, vol. 52, no. 1, pp. 101–111, Jan. 2022.
- [121] J. A. Alzubi, R. Jain, P. Nagrath, S. Satapathy, S. Taneja, and P. Gupta, "Deep image captioning using an ensemble of CNN and LSTM based deep neural networks," *J. Intell. Fuzzy Syst.*, vol. 40, no. 4, pp. 5761–5769, 2021.
- [122] M. Z. Asghar et al., "Senti-eSystem: A sentiment-based eSystem-using hybridized fuzzy and deep neural network for measuring customer satisfaction," *Softw.: Pract. Exp.*, vol. 51, no. 3, pp. 571–594, 2021.
- [123] G. Wang and J. Qiao, "An efficient self-organizing deep fuzzy neural network for nonlinear system modeling," *IEEE Trans. Fuzzy Syst.*, vol. 30, no. 7, pp. 2170–2182, Jul. 2022.
- [124] H. Pourmeidani and R. F. Demara, "High-accuracy deep belief network: Fuzzy neural networks using MRAM-based stochastic neurons," *IEEE J. Explor. Solid-State Comput.*, vol. 7, no. 2, pp. 125–131, Dec. 2021.
- [125] R. Sharma, T. Goel, M. Tanveer, S. Dwivedi, and R. Murugan, "FAF-DRVFL: Fuzzy activation function based deep random vector functional links network for early diagnosis of alzheimer disease," *Appl. Soft Comput.*, vol. 106, 2021, Art. no. 107371.
- [126] S. N. Qasem and A. Mohammadzadeh, "A deep learned type-2 fuzzy neural network: Singular value decomposition approach," *Appl. Soft Comput.*, vol. 105, 2021, Art. no. 107244.
- [127] Y. Wang and C. Luo, "An intelligent quantitative trading system based on intuitionistic-GRU fuzzy neural networks," *Appl. Soft Comput.*, vol. 108, 2021, Art. no. 107471.

- [128] M. R. C. Qazani, H. Asadi, M. Al-Ashmori, S. Mohamed, C. P. Lim, and S. Nahavandi, "Time series prediction of driving motion scenarios using fuzzy neural networks: Motion signal prediction using FNNs," in *Proc. IEEE Int. Conf. Mechatronics*, 2021, pp. 1–6.
- [129] J. Sun et al., "A hybrid deep neural network for classification of schizophrenia using EEG data," *Sci. Rep.*, vol. 11, no. 1, pp. 1–16, 2021.
- [130] L. Dong, F. Jiang, M. Wang, and X. Li, "Fuzzy deep wavelet neural network with hybrid learning algorithm: Application to electrical resistivity imaging inversion," *Knowl.-Based Syst.*, vol. 242, 2022, Art. no. 108164.
- [131] J. Yu, J. Kim, X. Li, Y. Jong, K. Kim, and G. Ryang, "Water quality forecasting based on data decomposition, fuzzy clustering and deep learning neural network," *Environ. Pollut.*, vol. 303, 2022, Art. no. 119136.
- [132] S. Ghosal, M. Sarkar, and R. Sarkar, "NoFED-Net: Nonlinear fuzzy ensemble of deep neural networks for human activity recognition," *IEEE Internet Things J.*, vol. 9, no. 18, pp. 17526–17535, Sep. 2022.
- [133] L. He, Y. Chen, and K. Wu, "Fuzzy granular deep convolutional network with residual structures," *Knowl.-Based Syst.*, vol. 258, 2022, Art. no. 109941.
- [134] W. Zheng, L. Yan, C. Gou, and F. Wang, "Fuzzy deep forest with deep contours feature for leaf cultivar classification," *IEEE Trans. Fuzzy Syst.*, vol. 30, no. 12, pp. 5431–5444, Dec. 2022.
- [135] C. F. Vega, J. Quevedo, E. Escandón, M. Kiani, W. Ding, and J. Andreu-Perez, "Fuzzy temporal convolutional neural networks in p300-based brain-computer interface for smart home interaction," *Appl. Soft Comput.*, vol. 117, 2022, Art. no. 108359.
- [136] A. Kumar, S. R. Sangwan, A. Arora, and V. G. Menon, "Depress-DCNF: A deep convolutional neuro-fuzzy model for detection of depression episodes using IoMT," *Appl. Soft Comput.*, vol. 122, 2022, Art. no. 108863.
- [137] W. Zhou, M. Liu, and Z. Xu, "The dual-fuzzy convolutional neural network to deal with handwritten image recognition," *IEEE Trans. Fuzzy Syst.*, vol. 30, no. 12, pp. 5225–5236, Dec. 2022.
- [138] A. Y. Zaremarjal, D. Yiltas-Kaplan, and S. Lazemi, "Emotion extraction from text using fuzzy-deep neural network," in *Proc. Conf. Intell. Fuzzy Techn. Emerg. Conditions Digit. Transformation*, 2021, pp. 329–338.
- [139] D. Muthusamy and P. Rakkimuthu, "Trilateral filterative hermitian feature transformed deep perceptive fuzzy neural network for finger vein verification," *Expert Syst. Appl.*, vol. 196, 2022, Art. no. 116678.
- [140] J. Wang, Q. Chang, T. Gao, K. Zhang, and N. R. Pal, "Sensitivity analysis of Takagi–Sugeno fuzzy neural network," *Inf. Sci.*, vol. 582, pp. 725–749, 2022.
- [141] H. Rafiei and M. Akbarzadeh-T, "Reliable fuzzy neural networks for systems identification and control," *IEEE Trans. Fuzzy Syst.*, vol. 31, no. 7, pp. 2251–2263, Jul. 2023.
- [142] Q. Tu, Q. Zhang, Z. Zhang, D. Gong, and M. Tang, "A deep spatiotemporal fuzzy neural network for subway passenger flow prediction with COVID-19 search engine data," *IEEE Trans. Fuzzy Syst.*, vol. 31, no. 2, pp. 394–406, Feb. 2023.
- [143] H. Nasiri and M. M. Ebadzadeh, "MFRFNN: Multi-functional recurrent fuzzy neural network for chaotic time series prediction," *Neurocomputing*, vol. 507, pp. 292–310, 2022.
- [144] K. V. Thakare, N. Sharma, D. P. Dogra, H. Choi, and I. Kim, "A multi-stream deep neural network with late fuzzy fusion for real-world anomaly detection," *Expert Syst. Appl.*, vol. 201, 2022, Art. no. 117030.
- [145] S. Dey, R. Roychoudhury, S. Malakar, and R. Sarkar, "An optimized fuzzy ensemble of convolutional neural networks for detecting tuberculosis from chest X-ray images," *Appl. Soft Comput.*, vol. 114, 2022, Art. no. 108094.
- [146] D. Tan, Z. Huang, X. Peng, W. Zhong, and V. Mahalec, "Deep adaptive fuzzy clustering for evolutionary unsupervised representation learning," *IEEE Trans. Neural Netw. Learn. Syst.*, early access, doi: [10.1109/TNNLS.2023.3243666](https://doi.org/10.1109/TNNLS.2023.3243666).
- [147] Y. Wang, H. Ishibuchi, M. J. Er, and J. Zhu, "Unsupervised multi-layer fuzzy neural networks for image clustering," *Inf. Sci.*, vol. 622, pp. 682–709, 2023.
- [148] C. Wang, X. Lv, M. Shao, Y. Qian, and Y. Zhang, "A novel fuzzy hierarchical fusion attention convolution neural network for medical image super-resolution reconstruction," *Inf. Sci.*, vol. 622, pp. 424–436, 2023.
- [149] C. Zhang, Y. Lin, C. P. Chen, H. Yao, H. Cai, and W. Fang, "Fuzzy representation learning on graph," *IEEE Trans. Fuzzy Syst.*, vol. 31, no. 10, pp. 3358–3370, Oct. 2023.
- [150] X. Ma et al., "Deep image feature learning with fuzzy rules," *IEEE Trans. Emerg. Topics Comput. Intell.*, vol. 8, no. 1, pp. 724–737, Feb. 2024.
- [151] C. Lin and T. Yang, "A fusion-based convolutional fuzzy neural network for lung cancer classification," *Int. J. Fuzzy Syst.*, vol. 25, no. 2, pp. 451–467, 2023.
- [152] N. R. Raz, M. Akbarzadeh-T, and S. Setayeshi, "Influence-based nano fuzzy swarm oxygen deficiency detection and therapy," *IEEE Trans. Syst., Man, Cybern. Syst.*, vol. 53, no. 8, pp. 4994–5005, Aug. 2023.
- [153] R. Yin, X. Pan, L. Zhang, J. Yang, and W. Lu, "A rule-based deep fuzzy system with nonlinear fuzzy feature transform for data classification," *Inf. Sci.*, vol. 633, pp. 431–452, 2023.
- [154] P. Pham, L. T. Nguyen, N. T. Nguyen, R. Kozma, and B. Vo, "A hierarchical fused fuzzy deep neural network with heterogeneous network embedding for recommendation," *Inf. Sci.*, vol. 620, pp. 105–124, 2023.
- [155] F. Aghaeipoor, M. Sabokrou, and A. Fernández, "Fuzzy rule-based explainer systems for deep neural networks: From local explainability to global understanding," *IEEE Trans. Fuzzy Syst.*, vol. 31, no. 9, pp. 3069–3080, Sep. 2023.
- [156] L. Zhang, Y. Shi, Y. Chang, and C. Lin, "Robust fuzzy neural network with an adaptive inference engine," *IEEE Trans. Cybern.*, vol. 54, no. 5, pp. 3275–3285, 2024.
- [157] I. C. G. L. Sindhuraj and A. J. Patrick, "Loan eligibility prediction using adaptive hybrid optimization driven-deep neuro fuzzy network," *Expert Syst. Appl.*, vol. 224, 2023, Art. no. 119903.
- [158] J. Lu, V. Behbood, P. Hao, H. Zuo, S. Xue, and G. Zhang, "Transfer learning using computational intelligence: A survey," *Knowl.-Based Syst.*, vol. 80, pp. 14–23, 2015.
- [159] X. Zhang, X. Zhang, H. Liu, and X. Liu, "Multi-task clustering through instances transfer," *Neurocomputing*, vol. 251, pp. 145–155, 2017.
- [160] H. Venkateswara, S. Chakraborty, and S. Panchanathan, "Deep-learning systems for domain adaptation in computer vision: Learning transferable feature representations," *IEEE Signal Process. Mag.*, vol. 34, no. 6, pp. 117–129, Nov. 2017.
- [161] L. Duan, I. W. Tsang, and D. Xu, "Domain transfer multiple kernel learning," *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 34, no. 3, pp. 465–479, Mar. 2012.
- [162] T. G. Dietterich, P. Domingos, L. Getoor, S. Muggleton, and P. Tadepalli, "Structured machine learning: The next ten years," *Mach. Learn.*, vol. 73, no. 1, pp. 3–23, 2008.
- [163] Q. Liu, X. Liao, H. L. Carin, J. R. Stack, and L. Carin, "Semisupervised multitask learning," *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 31, no. 6, pp. 1074–1086, Jun. 2009.
- [164] H. Zuo, G. Zhang, V. Behbood, J. Lu, and X. Meng, "Transfer learning in hierarchical feature spaces," in *Proc. 10th Int. Conf. Intell. Syst. Knowl. Eng.*, 2015, pp. 183–188.
- [165] Z. Fang, J. Lu, F. Liu, J. Xuan, and G. Zhang, "Open set domain adaptation: Theoretical bound and algorithm," *IEEE Trans. Neural Netw. Learn. Syst.*, vol. 32, no. 10, pp. 4309–4322, Oct. 2021.
- [166] J. Yang, R. Yan, and A. G. Hauptmann, "Cross-domain video concept detection using adaptive SVMs," in *Proc. 15th ACM Int. Conf. Multimedia*, 2007, pp. 188–197.
- [167] Z. Fang, J. Lu, F. Liu, and G. Zhang, "Semi-supervised heterogeneous domain adaptation: Theory and algorithms," *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 45, no. 1, pp. 1087–1105, Jan. 2023.
- [168] V. Behbood, J. Lu, G. Zhang, and W. Pedrycz, "Multistep fuzzy bridged refinement domain adaptation algorithm and its application to bank failure prediction," *IEEE Trans. Fuzzy Syst.*, vol. 23, no. 6, pp. 1917–1935, Dec. 2015.
- [169] D. Wu, V. J. Lawhern, S. Gordon, B. J. Lance, and C. Lin, "Driver drowsiness estimation from EEG signals using online weighted adaptation regularization for regression (OwARR)," *IEEE Trans. Fuzzy Syst.*, vol. 25, no. 6, pp. 1522–1535, Dec. 2017.
- [170] R. Gargees, J. M. Keller, and M. Popescu, "TLPCM: Transfer learning possibilistic c-means," *IEEE Trans. Fuzzy Syst.*, vol. 29, no. 4, pp. 940–952, Apr. 2021.
- [171] S. Sun, J. Yun, H. Lin, N. Zhang, A. Abraham, and H. Liu, "Granular transfer learning using type-2 fuzzy HMM for text sequence recognition," *Neurocomputing*, vol. 214, pp. 126–133, 2016.
- [172] A. K. Shukla, S. Kumar, R. Jagdev, P. K. Muhuri, and Q. D. Lohani, "Interval type-2 fuzzy weighted extreme learning machine for GDP prediction," in *Proc. Int. Joint Conf. Neural Netw.*, 2018, pp. 1–8.
- [173] S. Kumar, A. K. Shukla, P. K. Muhuri, and Q. D. Lohani, "Transfer learning based GDP prediction from uncertain carbon emission data," in *Proc. IEEE Int. Conf. Fuzzy Syst.*, 2019, pp. 1–6.
- [174] J. Shell and S. Coupland, "Fuzzy transfer learning: Methodology and application," *Inf. Sci.*, vol. 293, pp. 59–79, 2015.

- [175] S. K. Meher and N. S. Kothari, "Interpretable rule-based fuzzy ELM and domain adaptation for remote sensing image classification," *IEEE Trans. Geosci. Remote Sens.*, vol. 59, no. 7, pp. 5907–5919, Jul. 2021.
- [176] Z. Deng, Y. Jiang, F. Chung, H. Ishibuchi, and S. Wang, "Knowledge-leverage-based fuzzy system and its modeling," *IEEE Trans. Fuzzy Syst.*, vol. 21, no. 4, pp. 597–609, Aug. 2013.
- [177] Z. Deng, Y. Jiang, K. Choi, F. Chung, and S. Wang, "Knowledge-leverage-based TSK fuzzy system modeling," *IEEE Trans. Neural Netw. Learn. Syst.*, vol. 24, no. 8, pp. 1200–1212, Aug. 2013.
- [178] Z. Deng, Y. Jiang, H. Ishibuchi, K. Choi, and S. Wang, "Enhanced knowledge-leverage-based TSK fuzzy system modeling for inductive transfer learning," *ACM Trans. Intell. Syst. Technol.*, vol. 8, no. 1, pp. 1–21, 2016.
- [179] C. Yang, Z. Deng, K. Choi, and S. Wang, "Takagi–Sugeno–Kang transfer learning fuzzy logic system for the adaptive recognition of epileptic electroencephalogram signals," *IEEE Trans. Fuzzy Syst.*, vol. 24, no. 5, pp. 1079–1094, Oct. 2016.
- [180] Y. Jiang et al., "Seizure classification from EEG signals using transfer learning, semi-supervised learning and TSK fuzzy system," *IEEE Trans. Neural Syst. Rehabil. Eng.*, vol. 25, no. 12, pp. 2270–2284, Dec. 2017.
- [181] Z. Deng, P. Xu, L. Xie, K. Choi, and S. Wang, "Transductive joint-knowledge-transfer TSK FS for recognition of epileptic EEG signals," *IEEE Trans. Neural Syst. Rehabil. Eng.*, vol. 26, no. 8, pp. 1481–1494, Aug. 2018.
- [182] L. Xie, Z. Deng, P. Xu, K. Choi, and S. Wang, "Generalized hidden-mapping transductive transfer learning for recognition of epileptic electroencephalogram signals," *IEEE Trans. Cybern.*, vol. 49, no. 6, pp. 2200–2214, Jun. 2019.
- [183] Y. Jiang et al., "Smart diagnosis: A multiple-source transfer TSK fuzzy system for EEG seizure identification," *ACM Trans. Multimedia Comput. Commun. Appl.*, vol. 16, no. 2s, pp. 1–21, 2020.
- [184] Y. Jiang, Y. Zhang, C. Lin, D. Wu, and C. Lin, "EEG-based driver drowsiness estimation using an online multi-view and transfer TSK fuzzy system," *IEEE Trans. Intell. Transp. Syst.*, vol. 22, no. 3, pp. 1752–1764, Mar. 2021.
- [185] P. Xu et al., "Transfer representation learning with TSK fuzzy system," *IEEE Trans. Fuzzy Syst.*, vol. 29, no. 3, pp. 649–663, Mar. 2021.
- [186] H. Zuo, G. Zhang, W. Pedrycz, V. Behbood, and J. Lu, "Fuzzy regression transfer learning in Takagi–Sugeno fuzzy models," *IEEE Trans. Fuzzy Syst.*, vol. 25, no. 6, pp. 1795–1807, Dec. 2017.
- [187] H. Zuo, G. Zhang, J. Lu, and W. Pedrycz, "Fuzzy rule-based transfer learning for label space adaptation," in *Proc. IEEE Int. Conf. Fuzzy Syst.*, 2017, pp. 1–6.
- [188] H. Zuo, G. Zhang, W. Pedrycz, V. Behbood, and J. Lu, "Granular fuzzy regression domain adaptation in Takagi–Sugeno fuzzy models," *IEEE Trans. Fuzzy Syst.*, vol. 26, no. 2, pp. 847–858, Apr. 2018.
- [189] H. Zuo, J. Lu, G. Zhang, and F. Liu, "Fuzzy transfer learning using an infinite Gaussian mixture model and active learning," *IEEE Trans. Fuzzy Syst.*, vol. 27, no. 2, pp. 291–303, Feb. 2019.
- [190] K. Li, J. Lu, H. Zuo, and G. Zhang, "Multi-source domain adaptation with fuzzy-rule based deep neural networks," in *Proc. IEEE Int. Conf. Fuzzy Syst.*, 2021, pp. 1–6.
- [191] K. Li, J. Lu, H. Zuo, and G. Zhang, "Source-free multi-domain adaptation with fuzzy rule-based deep neural networks," *IEEE Trans. Fuzzy Syst.*, vol. 31, no. 12, pp. 4180–4194, Dec. 2023.
- [192] H. Zuo, J. Lu, G. Zhang, and W. Pedrycz, "Fuzzy rule-based domain adaptation in homogeneous and heterogeneous spaces," *IEEE Trans. Fuzzy Syst.*, vol. 27, no. 2, pp. 348–361, Feb. 2019.
- [193] X. Che, H. Zuo, J. Lu, and D. Chen, "Fuzzy multioutput transfer learning for regression," *IEEE Trans. Fuzzy Syst.*, vol. 30, no. 7, pp. 2438–2451, Jul. 2022.
- [194] S. K. Pal and A. Ghosh, "Fuzzy geometry in image analysis," *Fuzzy Sets Syst.*, vol. 48, no. 1, pp. 23–40, 1992.
- [195] J. Yang, G. Wang, and Q. Zhang, "Knowledge distance measure in multi-granulation spaces of fuzzy equivalence relations," *Inf. Sci.*, vol. 448, pp. 18–35, 2018.
- [196] F. Liu, G. Zhang, and J. Lu, "A novel fuzzy neural network for unsupervised domain adaptation in heterogeneous scenarios," in *Proc. IEEE Int. Conf. Fuzzy Syst.*, 2019, pp. 1–6.
- [197] G. Ma, J. Lu, and G. Zhang, "Multi-source domain adaptation with interval-valued target data via fuzzy neural networks," *IEEE Trans. Fuzzy Syst.*, early access, doi: [10.1109/TFUZZ.2024.3367456](https://doi.org/10.1109/TFUZZ.2024.3367456).
- [198] K. Li, J. Lu, H. Zuo, and G. Zhang, "Attention-bridging TS fuzzy rules for universal multi-domain adaptation without source data," in *Proc. IEEE Int. Conf. Fuzzy Syst.*, 2023, pp. 1–6.
- [199] G. Ma, J. Lu, F. Liu, Z. Fang, and G. Zhang, "Domain adaptation with interval-valued observations: Theory and algorithms," *IEEE Trans. Fuzzy Syst.*, early access, doi: [10.1109/TFUZZ.2024.3367460](https://doi.org/10.1109/TFUZZ.2024.3367460).
- [200] G. Ma, J. Lu, and G. Zhang, "Interval-valued observations-based multi-source domain adaptation using fuzzy neural networks," in *Proc. IEEE Int. Conf. Fuzzy Syst.*, 2023, pp. 1–6.
- [201] B. Zhang, S. Qin, W. Wang, D. Wang, and L. Xue, "Data stream clustering based on fuzzy c-mean algorithm and entropy theory," *Signal Process.*, vol. 126, pp. 111–116, 2016.
- [202] T. Hong, C. Chen, Y. Li, and M. Wu, "Using fuzzy c-means to discover concept-drift patterns for membership functions," *Trans. Fuzzy Sets Syst.*, vol. 1, no. 2, pp. 21–31, 2022.
- [203] Y. Song, G. Zhang, J. Lu, and H. Lu, "A fuzzy kernel c-means clustering model for handling concept drift in regression," in *Proc. IEEE Int. Conf. Fuzzy Syst.*, 2017, pp. 1–6.
- [204] Y. Song, G. Zhang, H. Lu, and J. Lu, "A noise-tolerant fuzzy c-means based drift adaptation method for data stream regression," in *Proc. IEEE Int. Conf. Fuzzy Syst.*, 2019, pp. 1–6.
- [205] A. Bechini, F. Marcelloni, and A. Renda, "TSF-DBSCAN: A novel fuzzy density-based approach for clustering unbounded data streams," *IEEE Trans. Fuzzy Syst.*, vol. 30, no. 3, pp. 623–637, Mar. 2022.
- [206] Q. Zhang, D. Wu, G. Zhang, and J. Lu, "Fuzzy user-interest drift detection based recommender systems," in *Proc. IEEE Int. Conf. Fuzzy Syst.*, 2016, pp. 1274–1281.
- [207] F. Dong, G. Zhang, J. Lu, and K. Li, "Fuzzy competence model drift detection for data-driven decision support systems," *Knowl.-Based Syst.*, vol. 143, pp. 284–294, 2018.
- [208] M. Pratama, J. Lu, E. Lughofer, G. Zhang, and M. J. Er, "An incremental learning of concept drifts using evolving type-2 recurrent fuzzy neural networks," *IEEE Trans. Fuzzy Syst.*, vol. 25, no. 5, pp. 1175–1192, Oct. 2017.
- [209] Y. Song, G. Zhang, H. Lu, and J. Lu, "A self-adaptive fuzzy network for prediction in non-stationary environments," in *Proc. IEEE Int. Conf. Fuzzy Syst.*, 2018, pp. 1–8.
- [210] C. Garcia, D. Leite, and I. Škrjanc, "Incremental missing-data imputation for evolving fuzzy granular prediction," *IEEE Trans. Fuzzy Syst.*, vol. 28, no. 10, pp. 2348–2362, Oct. 2020.
- [211] Á. M. García-Vico, C. J. Carmona, P. Gonzalez, H. Seker, and M. J. Jesus, "FEPDS: A proposal for the extraction of fuzzy emerging patterns in data streams," *IEEE Trans. Fuzzy Syst.*, vol. 28, no. 12, pp. 3193–3203, Dec. 2020.
- [212] E. Lughofer and P. Angelov, "Handling drifts and shifts in on-line data streams with evolving fuzzy systems," *Appl. Soft Comput.*, vol. 11, no. 2, pp. 2057–2068, 2011.
- [213] H. Yu, J. Lu, and G. Zhang, "Topology learning-based fuzzy random neural networks for streaming data regression," *IEEE Trans. Fuzzy Syst.*, vol. 30, no. 2, pp. 412–425, Feb. 2022.
- [214] D. Ge and X.-J. Zeng, "Learning data streams online—An evolving fuzzy system approach with self-learning/adaptive thresholds," *Inf. Sci.*, vol. 507, pp. 172–184, 2020.
- [215] X. Gu and Q. Shen, "A self-adaptive fuzzy learning system for streaming data prediction," *Inf. Sci.*, vol. 579, pp. 623–647, 2021.
- [216] X. Gu, "An explainable semi-supervised self-organizing fuzzy inference system for streaming data classification," *Inf. Sci.*, vol. 583, pp. 364–385, 2022.
- [217] M. M. Ferdaus, M. Pratama, S. G. Anavatti, and M. A. Garratt, "PALM: An incremental construction of hyperplanes for data stream regression," *IEEE Trans. Fuzzy Syst.*, vol. 27, no. 11, pp. 2115–2129, Nov. 2019.
- [218] D. Leite, G. Andonovski, I. Škrjanc, and F. Gomide, "Optimal rule-based granular systems from data streams," *IEEE Trans. Fuzzy Syst.*, vol. 28, no. 3, pp. 583–596, Mar. 2020.
- [219] Y. Liu, J. Zhao, W. Wang, and W. Pedrycz, "Prediction intervals for granular data streams based on evolving type-2 fuzzy granular neural network dynamic ensemble," *IEEE Trans. Fuzzy Syst.*, vol. 29, no. 4, pp. 874–888, Apr. 2021.
- [220] P. C. de Lima e Silva, C. A. S. Junior, M. A. Alves, R. Silva, M. W. Cohen, and F. G. Guimarães, "Forecasting in non-stationary environments with fuzzy time series," *Appl. Soft Comput.*, vol. 97, 2020, Art. no. 106825.
- [221] C. A. Severiano, P. C. de Lima e Silva, M. W. Cohen, and F. G. Guimarães, "Evolving fuzzy time series for spatio-temporal forecasting in renewable energy systems," *Renewable Energy*, vol. 171, pp. 764–783, 2021.
- [222] A. Liu, J. Lu, and G. Zhang, "Concept drift detection: Dealing with missing values via fuzzy distance estimations," *IEEE Trans. Fuzzy Syst.*, vol. 29, no. 11, pp. 3219–3233, Nov. 2021.

- [223] A. Liu, G. Zhang, and J. Lu, "Fuzzy time windowing for gradual concept drift adaptation," in *Proc. IEEE Int. Conf. Fuzzy Syst.*, 2017, pp. 1–6.
- [224] Y. Song, G. Zhang, H. Lu, and J. Lu, "A fuzzy drift correlation matrix for multiple data stream regression," in *Proc. IEEE Int. Conf. Fuzzy Syst.*, 2020, pp. 1–6.
- [225] F. Dong, J. Lu, G. Zhang, and K. Li, "Active fuzzy weighting ensemble for dealing with concept drift," *Int. J. Comput. Intell. Syst.*, vol. 11, no. 1, pp. 438–450, 2018.
- [226] N. Zhang, X. Yao, and C. Luo, "The prediction of online time series with concept drift based on dynamic intuitionistic fuzzy cognitive map," *Intell. Data Anal.*, vol. 25, no. 4, pp. 949–972, 2021.
- [227] H. Yu, J. Lu, A. Liu, B. Wang, R. Li, and G. Zhang, "Real-time prediction system of train carriage load based on multi-stream fuzzy learning," *IEEE Trans. Intell. Transp. Syst.*, vol. 23, no. 9, pp. 15155–15165, Sep. 2022.
- [228] Q. Song and B. S. Chissom, "Fuzzy time series and its models," *Fuzzy Sets Syst.*, vol. 54, no. 3, pp. 269–277, 1993.
- [229] B. Lütjens, M. Everett, and J. P. How, "Safe reinforcement learning with model uncertainty estimates," in *Proc. Int. Conf. Robot. Autom.*, 2019, pp. 8662–8668.
- [230] R. Devidze, P. Kamalaruban, and A. Singla, "Exploration-guided reward shaping for reinforcement learning under sparse rewards," in *Proc. Int. Conf. Neural Inf. Process. Syst.*, 2022, pp. 5829–5842.
- [231] H. Zhang, K. Zhang, Y. Cai, and J. Han, "Adaptive fuzzy fault-tolerant tracking control for partially unknown systems with actuator faults via integral reinforcement learning method," *IEEE Trans. Fuzzy Syst.*, vol. 27, no. 10, pp. 1986–1998, Oct. 2019.
- [232] K. Zhang, H. Zhang, Y. Mu, and C. Liu, "Decentralized tracking optimization control for partially unknown fuzzy interconnected systems via reinforcement learning method," *IEEE Trans. Fuzzy Syst.*, vol. 29, no. 4, pp. 917–926, Apr. 2021.
- [233] N. Kumar, S. S. Rahman, and N. Dhakad, "Fuzzy inference enabled deep reinforcement learning-based traffic light control for intelligent transportation system," *IEEE Trans. Intell. Transp. Syst.*, vol. 22, no. 8, pp. 4919–4928, Aug. 2021.
- [234] J. Li, H. Shi, and K. Hwang, "Using fuzzy logic to learn abstract policies in large-scale multiagent reinforcement learning," *IEEE Trans. Fuzzy Syst.*, vol. 30, no. 12, pp. 5211–5224, Dec. 2022.
- [235] A. Zhu, H. Ai, and L. Chen, "A fuzzy logic reinforcement learning control with spring-damper device for space robot capturing satellite," *Appl. Sci.*, vol. 12, no. 5, 2022, Art. no. 2662.
- [236] B. Fang, C. Zheng, H. Wang, and T. Yu, "Two stream fused fuzzy deep neural network for multi-agent learning," *IEEE Trans. Fuzzy Syst.*, vol. 31, no. 2, pp. 511–520, Feb. 2023.
- [237] F. Fathinezhad, V. Derhami, and M. Rezaeian, "Supervised fuzzy reinforcement learning for robot navigation," *Appl. Soft Comput.*, vol. 40, pp. 33–41, 2016.
- [238] D. Hein, A. Hentschel, T. Runkler, and S. Udluft, "Particle swarm optimization for generating interpretable fuzzy reinforcement learning policies," *Eng. Appl. Artif. Intell.*, vol. 65, pp. 87–98, 2017.
- [239] L. Yin and Y. Li, "Fuzzy vector reinforcement learning algorithm for generation control of power systems considering flywheel energy storage," *Appl. Soft Comput.*, vol. 125, 2022, Art. no. 109149.
- [240] H. Shi, Z. Lin, S. Zhang, X. Li, and K. Hwang, "An adaptive decision-making method with fuzzy Bayesian reinforcement learning for robot soccer," *Inf. Sci.*, vol. 436, pp. 268–281, 2018.
- [241] K. Atanassov, "Intuitionistic fuzzy sets," *Fuzzy Sets Syst.*, vol. 20, pp. 87–96, 1986.
- [242] J. Lu, Y. Zhu, X. Zeng, L. Koehl, J. Ma, and G. Zhang, "A linguistic multi-criteria group decision support system for fabric hand evaluation," *Fuzzy Optim. Decis. Mak.*, vol. 8, pp. 395–413, 2009.
- [243] H. Ishibuchi and T. Nakashima, "Effect of rule weights in fuzzy rule-based classification systems," *IEEE Trans. Fuzzy Syst.*, vol. 9, no. 4, pp. 506–515, Aug. 2001.
- [244] C. Cornelis, J. Lu, X. Guo, and G. Zhang, "One-and-only item recommendation with fuzzy logic techniques," *Inf. Sci.*, vol. 177, no. 22, pp. 4906–4921, 2007.
- [245] R. Katarya and O. P. Verma, "An effective web page recommender system with fuzzy c-mean clustering," *Multimedia Tools Appl.*, vol. 76, pp. 21481–21496, 2017.
- [246] R. Katarya and O. Verma, "Recommender system with grey wolf optimizer and FCM," *Neural Comput. Appl.*, vol. 30, pp. 1679–1687, 2018.
- [247] C. Selvi and E. Sivasankar, "A novel optimization algorithm for recommender system using modified fuzzy c-means clustering approach," *Soft Comput.*, vol. 23, pp. 1901–1916, 2019.
- [248] M. Nilashi, O. B. Ibrahim, N. Ithnin, and R. Zakaria, "A multi-criteria recommendation system using dimensionality reduction and neuro-fuzzy techniques," *Soft Comput.*, vol. 19, pp. 3173–3207, 2015.
- [249] R. Yera, A. A. Alzahrani, and L. Martínez, "A fuzzy content-based group recommender system with dynamic selection of the aggregation functions," *Int. J. Approx. Reasoning*, vol. 150, pp. 273–296, 2022.
- [250] A. R. Sulthana and S. Ramasamy, "Ontology and context based recommendation system using neuro-fuzzy classification," *Comput. Elect. Eng.*, vol. 74, pp. 498–510, 2019.
- [251] S. G. K. Patro, B. K. Mishra, S. K. Panda, R. Kumar, H. V. Long, and T. M. Tuan, "Knowledge-based preference learning model for recommender system using adaptive neuro-fuzzy inference system," *J. Intell. Fuzzy Syst.*, vol. 39, no. 3, pp. 4651–4665, 2020.
- [252] W. Zhang, X. Zhang, and D. Chen, "Causal neural fuzzy inference modeling of missing data in implicit recommendation system," *Knowl.-Based Syst.*, vol. 222, 2021, Art. no. 106678.
- [253] B. Walek and P. Fajmon, "A hybrid recommender system for an online store using a fuzzy expert system," *Expert Syst. Appl.*, vol. 212, 2023, Art. no. 118565.
- [254] M. Kuanr, B. K. Rath, and S. N. Mohanty, "Crop recommender system for the farmers using Mamdani fuzzy inference model," *Int. J. Eng. Technol.*, vol. 7, no. 4.15, pp. 277–280, 2018.
- [255] J. Castro, R. Yera, and L. Martínez, "A fuzzy approach for natural noise management in group recommender systems," *Expert Syst. Appl.*, vol. 94, pp. 237–249, 2018.
- [256] T. Rutkowski, J. Romanowski, P. Woldan, P. Staszewski, R. Nielek, and L. Rutkowski, "A content-based recommendation system using neuro-fuzzy approach," in *Proc. IEEE Int. Conf. Fuzzy Syst.*, 2018, pp. 1–8.
- [257] K. Almohammadi et al., "A type-2 fuzzy logic recommendation system for adaptive teaching," *Soft Comput.*, vol. 21, pp. 965–979, 2017.
- [258] P. Nagaraj and P. Deepalakshmi, "An intelligent fuzzy inference rule-based expert recommendation system for predictive diabetes diagnosis," *Int. J. Imag. Syst. Technol.*, vol. 32, no. 4, pp. 1373–1396, 2022.
- [259] R. Karthik and S. Ganapathy, "A fuzzy recommendation system for predicting the customers interests using sentiment analysis and ontology in e-commerce," *Appl. Soft Comput.*, vol. 108, 2021, Art. no. 107396.
- [260] S. Yan, S. Pirooznia, A. Heidari, N. J. Navimipour, and M. Unal, "Implementation of a product-recommender system in an IoT-based smart shopping using fuzzy logic and apriori algorithm," *IEEE Trans. Eng. Manage.*, vol. 71, pp. 4940–4954, 2024.
- [261] N. R. Kermany and S. H. Alizadeh, "A hybrid multi-criteria recommender system using ontology and neuro-fuzzy techniques," *Electron. Commerce Res. Appl.*, vol. 21, pp. 50–64, 2017.
- [262] G. Manogaran, R. Varatharajan, and M. K. Priyan, "Hybrid recommendation system for heart disease diagnosis based on multiple kernel learning with adaptive neuro-fuzzy inference system," *Multimedia Tools Appl.*, vol. 77, pp. 4379–4399, 2018.
- [263] N. T. Thong et al., "Intuitionistic fuzzy recommender systems: An effective tool for medical diagnosis," *Knowl.-Based Syst.*, vol. 74, pp. 133–150, 2015.
- [264] J. Guo, J. Deng, and Y. Wang, "An intuitionistic fuzzy set based hybrid similarity model for recommender system," *Expert Syst. Appl.*, vol. 135, pp. 153–163, 2019.
- [265] R. Yera, J. Castro, and L. Martínez, "A fuzzy model for managing natural noise in recommender systems," *Appl. Soft Comput.*, vol. 40, pp. 187–198, 2016.
- [266] P. Wang, Y. Wang, L. Y. Zhang, and H. Zhu, "An effective and efficient fuzzy approach for managing natural noise in recommender systems," *Inf. Sci.*, vol. 570, pp. 623–637, 2021.
- [267] B. Saravanan, V. Mohanraj, and J. Senthilkumar, "A fuzzy entropy technique for dimensionality reduction in recommender systems using deep learning," *Soft Comput.*, vol. 23, pp. 2575–2583, 2019.
- [268] A. Zenebe and A. F. Norcio, "Representation, similarity measures and aggregation methods using fuzzy sets for content-based recommender systems," *Fuzzy Sets Syst.*, vol. 160, no. 1, pp. 76–94, 2009.
- [269] F. Shang, Y. Liu, J. Cheng, and D. Yan, "Fuzzy double trace norm minimization for recommendation systems," *IEEE Trans. Fuzzy Syst.*, vol. 26, no. 4, pp. 2039–2049, Aug. 2018.
- [270] J. Mezei and S. Nikou, "Fuzzy optimization to improve mobile health and wellness recommendation systems," *Knowl.-Based Syst.*, vol. 142, pp. 108–116, 2018.
- [271] I. Huitzil, F. Alegre, and F. Bobillo, "GimmeHop: A recommender system for mobile devices using ontology reasoners and fuzzy logic," *Fuzzy Sets Syst.*, vol. 401, pp. 55–77, 2020.

- [272] Z. Abbasi-Moud, S. Hosseinabadi, M. Kelarestaghi, and F. Eshghi, "CAFOB: Context-aware fuzzy-ontology-based tourism recommendation system," *Expert Syst. Appl.*, vol. 199, 2022, Art. no. 116877.
- [273] Z. Zhang, H. Lin, K. Liu, D. Wu, G. Zhang, and J. Lu, "A hybrid fuzzy-based personalized recommender system for telecom products/services," *Inf. Sci.*, vol. 235, pp. 117–129, 2013.
- [274] D. Wu, J. Lu, and G. Zhang, "A fuzzy tree matching-based personalized e-learning recommender system," *IEEE Trans. Fuzzy Syst.*, vol. 23, no. 6, pp. 2412–2426, Dec. 2015.
- [275] C. Martinez-Cruz, C. Porcel, J. Bernabé-Moreno, and E. Herrera-Viedma, "A model to represent users trust in recommender systems using ontologies and fuzzy linguistic modeling," *Inf. Sci.*, vol. 311, pp. 102–118, 2015.
- [276] R. Gao et al., "Fast and reliable evaluation of adversarial robustness with minimum-margin attack," in *Proc. Int. Conf. Mach. Learn.*, 2022, pp. 7144–7163.
- [277] H. Zuo, G. Zhang, and J. Lu, "Fuzzy transfer learning in heterogeneous space using Takagi-Sugeno fuzzy models," in *Proc. Int. Fuzzy Syst. Assoc. World Congr.*, 2019, pp. 752–763.
- [278] Z. Fang, J. Lu, A. Liu, F. Liu, and G. Zhang, "Learning bounds for open-set learning," in *Proc. Int. Conf. Mach. Learn.*, 2021, pp. 3122–3132.
- [279] T. Zang, Y. Zhu, H. Liu, R. Zhang, and J. Yu, "A survey on cross-domain recommendation: Taxonomies, methods, and future directions," *ACM Trans. Inf. Syst.*, vol. 41, no. 2, pp. 1–39, 2022.



Jie Lu (Fellow, IEEE) received the Ph.D. degree in information systems from Curtin University, Bentley, WA, Australia, in 2000.

She is currently an Australian Laureate Fellow, a Distinguished Professor, and the Director of the Australian Artificial Intelligence Institute, University of Technology Sydney, Sydney, NSW, Australia. She has authored or coauthored more than 500 papers in IEEE Transactions and other leading journals and conferences. Her main research interests include transfer learning, concept drift, fuzzy systems, decision support systems, and recommender systems.

Prof. Lu is the recipient of two IEEE TRANSACTIONS ON FUZZY SYSTEMS Outstanding Paper Awards in 2019 and 2022, the NeurIPS2022 Outstanding Paper Award, the Australia's Most Innovative Engineer Award in 2019, the Australasian Artificial Intelligence Distinguished Research Contribution Award in 2022, the Australian NSW Premier's Prize on Excellence in Engineering or Information and Communication Technology in 2023, and the Officer of the Order of Australia 2023. She is a Fellow of the International Fuzzy Systems Association.



Guangzhi Ma (Student Member, IEEE) received the M.S. degree in probability and statistics from the School of Mathematics and Statistics, Lanzhou University, Lanzhou, China, in 2020. He is currently working toward the Ph.D. degree with the Faculty of Engineering and Information Technology, University of Technology Sydney, Sydney, NSW, Australia.

He is a Member of the Decision Systems and e-Service Intelligence Lab, Australia Artificial Intelligence Institute, University of Technology Sydney. He has authored or coauthored several papers related to interval-valued data and transfer learning in IEEE International Conference on Fuzzy Systems, IEEE TRANSACTIONS ON FUZZY SYSTEMS, and IEEE TRANSACTIONS ON CYBERNETICS. His research interests include fuzzy transfer learning, domain adaptation, and interval-valued data analysis.



Guangquan Zhang received the Ph.D. degree in applied mathematics from Curtin University, Bentley, WA, Australia, in 2001.

He is currently an Associate Professor and the Director of the Decision Systems and e-Service Intelligent Research Laboratory, Australian Artificial Intelligence Institute, University of Technology Sydney, Sydney, NSW, Australia. From 1993 to 1997, he was a Full Professor with the Department of Mathematics, Hebei University, Baoding, China. He has authored or coauthored six authored monographs and more than 500 papers, including some 300 articles in leading international journals. He has supervised 40 Ph.D. students to completion and mentored 15 postdoctoral fellows. His research has been widely applied in industries. His main research interests include fuzzy multiobjective, bilevel and group decision making, fuzzy measures, transfer learning, and concept drift adaptation.

Dr. Zhang is the recipient of ten very competitive ARC Discovery grants and many other research projects. He is an Australian Research Council QEII Fellow.